

# Audiopipe®

HIGH PERFORMANCE CAR AUDIO PRODUCTS



**SPL** P-12  
(Sound Pressure Level)

**3000 WATTS**

**PABS** *Crelli*



**Fortaleza**  
**APBZ Series**  
*Class D Midrange*  
**AMPLIFIER**  
MADE IN KOREA

**TWX-BD SERIES**



**DOUBLE BASS**  
**Stacked**  
MORE POWER



**PUERTO RICO TEAM**

**Catalogue**  
**2016**

<b>Dealer Line</b>	<b>03</b>	35	<b>APNK Series</b>
<b>P-12 Subwoofer</b>	<b>09</b>	37	<b>APMA Amplifiers</b>
<b>TXX-FA1200</b>	<b>12</b>	56	<b>Octagon Subwoofer</b>
<b>TXX-BD Series</b>	<b>17</b>	67	<b>PABS Crew</b>
<b>EYE Candy</b>	<b>21</b>	69	<b>Drivers</b>
<b>NWA-1263</b>	<b>25</b>	81	<b>Mr. Chen Electronics</b>
<b>NWA-15204D</b>	<b>28</b>	83	<b>Enclosures</b>
<b>Lokon Music</b>	<b>31</b>	93	<b>Cables</b>
<b>APBZ Series</b>	<b>33</b>	107	<b>Accessories</b>
<b>AMPLIFIERS</b>		111	<b>Fuses</b>
		127	<b>PK Series</b>
		135	<b>ATVP Series</b>

## LOUD AND CLEAR

"We want the product to be loud, we want the music to sound clear and don't forget about endurance!"

We got the message and we are delivering with our 2016 line up.

Larger horns and more powerful drivers that can perform in open space and deliver a rich sound even at a good distance. These models are designed to deliver a loud performance without sacrificing installation space.

Such as the APH-5525BO-H aluminum horn with mounting depth of just 2.5" designed to hold a driver with a 2" throat!

Powerful amplifiers such as the Korean APK family with ratings as high as 6000Watts for subwoofers and Brazilian APBZ amplifiers designed for midbass speakers that can handle a frequency range of 35 to 10000Khz and deliver up to 60000watts in the top model. These amplifiers are designed to deliver the loud and clear sound the modern enthusiast demands.

Be sure to take a look at our new line of mini amplifiers APMI. We have upgraded the mosfets and increase the heatsink in order to improve heat dissipation. The new design with flared fins allows for better thermal performance even in tight spaces.



## CHINA FACTORY

Dealers - Dealers - Dealers. We have expanded our Dealer line adding two subwoofer families under TXX-BDL model that incorporates our latest and most popular technologies.

Double stacked magnet, Triple stacked magnet, Composite Cone, air cushioned foam surround and Audiopipe's easy connect terminal. The Audiopipe easy connect terminal allows for convenient parallel or series wiring, we also redesigned our dealer line of amplifiers boosting up the mosfets and improving the outer heat sink design.

Finally we introduce our long awaited model P. For pure SPL this model features Dual Conex Spider, 4' Voice Coil, 250oz magnet, and Direct Leads to Flat Wound Voice Coil to deliver a conveniently 10hm hook up that can deliver 3000Watts!

*Like our products, our customers' demands are loud and clear. Audiopipe is here to deliver a product that can handle the Endurance of your Loud and Clear World.*





## TXX-BDL2-12

2 YEAR WARRANTY

- 12" HIGH POWER CAR SUBWOOFER
- 1600WATTS POWER (P.M.P.O.)
- 800WATTS POWER (R.M.S.)
- FREQUENCY RESPONSE: 22-900HZ
- 2.5" 4-LAYER BLACK ALUMINUM VOICE COIL
- AIR CUSHION FOAM SURROUND COMPOSITE CONE
- DEEP BUMPED T-YOKE FEATURES OVERSIZED PIPE SHAPE
- POWDERED BLACK PATENT CAST ALUMINUM BASKET
- MOUNTING DEPTH: 188MM(7 3/8")
- 150 OZ STRONTIUM MAGNET
- IMPEDANCE: 2 X 4 OHMS
- SENSITIVITY: 88DB



**2**  
YEAR  
WARRANTY

1 year warranty extension is available when the unit is purchased, installed and registered by an AudioPro authorized dealer.

New Products  
**2016**

## TXX-BDL2-15

15" HIGH POWER CAR SUBWOOFER

- 1800WATTS POWER (P.M.P.O.)
- 900WATTS POWER (R.M.S.)
- FREQUENCY RESPONSE: 18-800HZ
- 3" 4-LAYER BLACK ALUMINUM VOICE COIL
- AIR CUSHION FOAM SURROUND COMPOSITE CONE
- DEEP BUMPED T-YOKE FEATURES OVERSIZED PIPE SHAPE
- POWDERED BLACK PATENT CAST ALUMINUM BASKET
- MOUNTING DEPTH: 209MM(8 1/4")
- 160 OZ STRONTIUM MAGNET
- IMPEDANCE: 2 X 4 OHMS
- SENSITIVITY: 90DB



HIGH POWER CAR SUBWOOFER

## TXX-BDL2 SERIES

**1600 WATTS**

DEALER *Line*



New Products  
**2016**

DEALER *Line*



# DEALER LINE

HIGH PERFORMANCE CAR AUDIO PRODUCTS

**TXX-BD2W-18D2**

2 YEAR WARRANTY



# SUBWOOFERS

**TXX-BDL3-15D2**

2 YEAR WARRANTY



2400 Watts

Speaker Size: 15"

**SPECIFICATIONS**

POWER (R.M.S)	1200 WATTS
FREQ. RESPONSE	18-800HZ
SENSITIVITY	97dB
VOICE COIL	4" 4-LAYER BLACK ALUM.
MOUNTING DEPTH	209MM (8 5/8")
IMPEDANCE	2X2 OHMS
	STRONTIUM MAGNET
	220 OZ

DEALER Line



DEALER Line



**SPECIFICATIONS TXX-BD2W-1B**

WOOFER SIZE	18"
POWER (R.M.S)	3000 WATTS
POWER (R.M.S)	1500 WATTS
FREQ. RESPONSE	16-800HZ
SENSITIVITY	91dB
COIL BASV	4" 4-LAYER DUAL VOICE
MOUNTING DEPTH	230MM (9 1/16")
IMPEDANCE	2X2 OHMS
MAGNET	250 OZ

**SPECIFICATIONS TXX-BD2W-1BD2**

WOOFER SIZE	18"
POWER (R.M.S)	3000 WATTS
POWER (R.M.S)	1500 WATTS
FREQ. RESPONSE	16-800HZ
SENSITIVITY	91dB
COIL BASV	4" 4-LAYER DUAL VOICE
MOUNTING DEPTH	230MM (9 1/16")
IMPEDANCE	2X2 OHMS
MAGNET	250 OZ

DEALER Line



**SPECIFICATIONS TXX-BDL3-1DD2**

WOOFER SIZE	10"
POWER (R.M.S)	1400 WATTS
POWER (R.M.S)	700 WATTS
FREQUENCY RESPONSE	20-1000HZ
SENSITIVITY	89dB
VOICE COIL	2.5" 4-LAYER DUAL / BASV
MOUNTING DEPTH	173MM (6 3/16")
IMPEDANCE	2X2 OHMS
STRONTIUM MAGNET	132 OZ

**SPECIFICATIONS TXX-BDL3-1D2**

WOOFER SIZE	12"
POWER (R.M.S)	1800 WATTS
POWER (R.M.S)	900 WATTS
FREQUENCY RESPONSE	20-900HZ
SENSITIVITY	93dB
VOICE COIL	3" 4-LAYER DUAL / BASV
MOUNTING DEPTH	193MM (7 5/8")
IMPEDANCE	2X2 OHMS
STRONTIUM MAGNET	204 OZ

## APDLI-20001D

2 YEAR WARRANTY



New Products  
**2016**

- CLASS-D POWER AMPLIFIER
- OVERLOAD PROTECTION
- OVERHEAT PROTECTION
- VARIABLE LOW PASS ELECTRONIC CROSSOVER
- VARIABLE SUBSONIC FILTER
- BUILT-IN VARIABLE PHASE SHIFT
- REMOTE SUB-WOOFER VOLUME CONTROL

WITH REMOTE BASS KNOB



### 2000 Watts

### Dealer Line

CHANNEL	1 CHANNEL CLASS D
FREQUENCY RESPONSE	8HZ - 180KHZ
SIGNAL TO NOISE RATIO	70DB
BASS BOOST	30-80HZ
INPUT SENSITIVITY	0.2-5V
SPEAKER IMPEDANCE	MIN 1Ω
TOTAL HARMONIC DIST	<0.15%
OUTPUT POWER (RMS)	1 CHANNEL @ 4Ω - 800W 1 CHANNEL @ 2Ω - 1200W 1 CHANNEL @ 1Ω - 2000W
DIMENSION (LXWXH)	433X176X55MM 17.04X6.92X2.16"

2 YEAR WARRANTY



WITH REMOTE BASS KNOB



### 1600 Watts

### Class AB Power Amplifiers

CHANNEL	2 CHANNEL CLASS AB
FREQUENCY RESPONSE	20HZ - 20KHZ
SIGNAL TO NOISE RATIO	100DB
BASS BOOST	0-180B @ 45HZ
INPUT SENSITIVITY	0.25V - 5V
SPEAKER IMPEDANCE	2Ω TO 4Ω
TOTAL HARMONIC DIST	<0.05%
OUTPUT POWER (RMS)	STEREO 2 CH-160W x 2@4Ω STEREO 2 CH-325W x 2@2Ω BRIDGE 1 CH-450W x 1@4Ω 382X176X55MM 15.03X6.92X2.16"
DIMENSION (LXWXH)	



1 year warranty extension is available when the unit is purchased, installed and registered by an Audioape authorized dealer

### SPECIFICATIONS

### APDLI-16001D

POWER AMPLIFIER	1600 WATTS
CHANNEL	1 CHANNEL CLASS D
FREQUENCY RESPONSE	8HZ - 180HZ
SIGNAL TO NOISE RATIO	>70DB
BASS BOOST FREQ.	30-80HZ
INPUT SENSITIVITY	0.2-5V
SPEAKER IMPEDANCE	MIN 1Ω
TOTAL HARMONIC DIST	<0.15%
OUTPUT POWER (RMS)	1 CHANNEL @ 4Ω - 650W 1 CHANNEL @ 2Ω - 1000W 1 CHANNEL @ 1Ω - 1600W
DIMENSION (LXWXH)	357X176X55MM 14.05X6.92X2.16"

**1600 WATTS**



New Products  
**2016**

- CLASS-D POWER AMPLIFIER
- OVERLOAD PROTECTION
- OVERHEAT PROTECTION
- VARIABLE LOW PASS ELECTRONIC CROSSOVER
- VARIABLE SUBSONIC FILTER
- BUILT-IN VARIABLE PHASE SHIFT
- REMOTE SUB-WOOFER VOLUME CONTROL

### SPECIFICATIONS

### APDLI-2504

POWER AMPLIFIER	2100 WATTS
CHANNEL	4 CHANNEL CLASS AB
FREQUENCY RESPONSE	20HZ - 20KHZ
SIGNAL TO NOISE RATIO	95DB
BASS BOOST	0-180B @ 45HZ
INPUT SENSITIVITY	0.25V - 5V
SPEAKER IMPEDANCE	2Ω TO 4Ω
TOTAL HARMONIC DIST	<0.05%
OUTPUT POWER (RMS)	STEREO 4 CH-110W x 4@4Ω STEREO 4 CH-160W x 4@2Ω BRIDGE 2 CH-300W x 2@4Ω 384X176X55MM 15.11X6.92X2.16"
DIMENSION (LXWXH)	

FOR THE BENEFIT OF ALL OUR CUSTOMERS, OUR NEW DEALER EXCLUSIVE AMPLIFIER LINE WILL CARRY A 1-YEAR EXTENDED MANUFACTURER'S WARRANTY (GIVING YOU A TOTAL OF 2 YEARS FROM THE DATE OF PURCHASE).

THIS WILL BE VALIDATED BY THE DEALER LOGGING INTO [HTTP://WWW.AUDIOAPE.COM/](http://WWW.AUDIOAPE.COM/) AND CREATING AN ACCOUNT AND REGISTERING THE PRODUCT. IN ADDITION, THE PRODUCT WILL NEED TO BE PURCHASED AND INSTALLED BY THE DEALER IN ORDER FOR THIS EXTENDED WARRANTY TO BE VALID. WE FEEL THAT THIS ADDED INCENTIVE WILL PROVE TO BE BENEFICIAL TO BOTH DEALERS AND CONSUMERS ALIKE.



1 year warranty extension is available when the unit is purchased, installed and registered by an Audioape authorized dealer



New Products  
**2016**

**2100 WATTS**



# SUBWOOFERS

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## P-12

HIGH POWER SUBWOOFER

- 3000 WATTS POWER (P.M.P.O.)
- 1500 WATTS POWER (R.M.S.)
- FREQ. RESPONSE: 25-1000HZ
- SENSITIVITY: 90DB
- 4P 4-LAYER DUAL VOICE COIL BASV
- POWDERED BLACK PAINT ALUMINUM BASKET.
- DUAL CONEX SPIDER.
- MOUNTING DEPTH: 230MM (9")
- IMPEDANCE: 2X2 OHMS
- 250 OZ MAGNET.
- FLAT-WOUND DIRECT LEADS.
- REINFORCED CENTER DUST CAP FOR ADDED CONE STRUCTURE.
- OVERSIZED RIGID PIPE STYLE BASKET.
- DUAL 2 OHMS COILS FOR EASY 1 OHM WIRING.
- HIGH ROLLED SURROUND FOR ADDITIONAL EXCURSION.

New Products  
**2016**

# P-12

## 3000 WATTS

**SPL**  
Sound Pressure Level

# SUBWOOFERS

## Q-12 & Q-15

EDGE EXTENSION TECHNOLOGY

### Q-12

- 2000 WATTS POWER (P.M.P.O.)
- 1000 WATTS POWER (R.M.S.)
- FREQUENCY RESPONSE: 15-900HZ
- SENSITIVITY: 87DB
- 3" 4-LAYER DUAL VOICE COIL BASV
- POWDERED BLACK PAINT ALUMINUM BASKET
- PATENT PIPE MULTI-CONNECT TERMINAL
- MOUNTING DEPTH: 240MM (9 7/16")
- IMPEDANCE: 2 X 4 OHMS
- 250 OZ MAGNET

## 2000 WATTS

### Q-15

- 2400 WATTS POWER (P.M.P.O.)
- 1200 WATTS POWER (R.M.S.)
- FREQUENCY RESPONSE: 14-850HZ
- SENSITIVITY: 87DB
- 3 3/4" 4-LAYER DUAL VOICE COIL BASV
- POWDERED BLACK PAINT ALUMINUM BASKET
- PATENT PIPE MULTI-CONNECT TERMINAL
- MOUNTING DEPTH: 240MM (9-7/16")
- IMPEDANCE: 2 X 4 OHMS
- 333 OZ MAGNET

## 2400 WATTS

# Q12 & 15

SUBWOOFER

**EXT6**  
Edge Extension Technology

# SUBWOOFERS

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## TS-FA 100

SHALLOW MOUNT SUBWOOFER



### 400 Watts

**SPECIFICATIONS**  
WOOFER SIZE 10"  
POWER (R.M.S.) 200 WATTS  
FREQ. RESPONSE 50-2000HZ  
SENSITIVITY 89dB  
VOICE COIL 1.5" TIL  
MOUNTING DEPTH 65MM (2-9/16")  
IMPEDANCE 2X4 OHMS  
MAGNET 40 OZ



### SPECIFICATIONS TS-FA80

WOOFER SIZE 8"  
POWER (P.M.P.O.) 300 WATTS  
POWER (R.M.S.) 150 WATTS  
FREQUENCY RESPONSE 70-2500HZ  
SENSITIVITY 89dB  
VOICE COIL 1.5"  
MOUNTING DEPTH 65MM (2-9/16")  
IMPEDANCE 2X4 OHMS  
MAGNET 32 OZ

### SPECIFICATIONS TS-FA120

WOOFER SIZE 12"  
POWER (P.M.P.O.) 500 WATTS  
POWER (R.M.S.) 250 WATTS  
FREQUENCY RESPONSE 40-1600HZ  
SENSITIVITY 91dB  
VOICE COIL 2" TIL  
MOUNTING DEPTH 73MM (2-7/8")  
IMPEDANCE 2X4 OHMS  
MAGNET 50 OZ

# SUBWOOFERS

## TXX-FA1200

SHALLOW MOUNT

- \* 800 WATTS POWER (P.M.P.O.)
- \* 400 WATTS POWER (R.M.S.)
- \* FREQ. RESPONSE: 35-1500HZ
- \* SENSITIVITY: 89dB
- \* 3" 4-LAYER DUAL VOICE COIL TIL.
- \* POWDERED BLACK PAINT ALUMINUM BASKET.
- \* FOAM SURROUND NON-PRESS PAPER CONE
- \* CHROME SPRING LOADED PUSH TERMINALS
- \* MOUNTING DEPTH: 100MM (4")
- \* IMPEDANCE: 2X4 OHMS
- \* 65 OZ MAGNET

**New Products**  
**2016**



**800 WATTS**





# SUBWOOFERS

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## TS-PP2 12-D4

DEALER LINE



**1000 Watts** Speaker Size: 12"

### SPECIFICATIONS

POWER (R.M.S)	500 WATTS
FREQ. RESPONSE	29-1500HZ
SENSITIVITY	86 DB
VOICE COIL	2" 4-LAYER KAPTON
MOUNTING DEPTH	142MM (5-5/8")
IMPEDANCE	4 OHMS
STRONTIUM MAGNET	68 OZ

# SUBWOOFERS

SUB-WOOFER / TRIPLE STACK

## TS-PP3 15-D4



**1400 Watts** Speaker Size: 15"

### SPECIFICATIONS

POWER (R.M.S)	700 WATTS
FREQ. RESPONSE	25-1200HZ
SENSITIVITY	90DB
VOICE COIL	2.5" KAPTON
MOUNTING DEPTH	182MM (7-1/5")
IMPEDANCE	2*4 OHMS 4 LAYERS
STRONTIUM MAGNET	120 OZ



### SPECIFICATIONS TS-PP2 12

WOOFER SIZE	12"
POWER (R.M.P.O)	1000 WATTS
POWER (R.M.S)	500 WATTS
FREQ. RESPONSE	29-1500HZ
SENSITIVITY	86 DB
COIL BASV	2" 4-LAYERS KAPTON
MOUNTING DEPTH	142MM (5-5/8")
IMPEDANCE	DUAL 4 OHMS
MAGNET	68 OZ



### SPECIFICATIONS TS-PP2 15-D4

WOOFER SIZE	12"
POWER (R.M.P.O)	1200 WATTS
POWER (R.M.S)	600 WATTS
FREQ. RESPONSE	25-1000HZ
SENSITIVITY	90 DB
COIL BASV	2.5" KAPTON
MOUNTING DEPTH	171MM (6-7/10")
IMPEDANCE	2*4 4 LAYERS
MAGNET	80 OZ



**1200 Watts** TS-PP3 12-D4

### SPECIFICATIONS

WOOFER SIZE	12"
POWER (R.M.S)	600 WATTS
FREQ. RESPONSE	25-1000HZ
SENSITIVITY	88 DB
VOICE COIL	2.5" KAPTON
MOUNTING DEPTH	148MM (5-4/5")
IMPEDANCE	2*4 OHMS 4 LAYERS
STRONTIUM MAGNET	105 OZ

# SUBWOOFERS

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## TS-AR 15

TS-AR SERIES / SINGLE COIL



**SINGLE COIL**



1000 Watts Speaker Size: 15"

**SPECIFICATIONS**

POWER (R.M.S) 500 WATTS  
 FREQ. RESPONSE 20-1000HZ  
 SENSITIVITY 91dB  
 VOICE COIL 2.5" 4 LAYER  
 MOUNTING DEPTH 180MM (7.07")  
 IMPEDANCE 4 OHMS  
 STRONTIUM MAGNET 73 OZ

# SUBWOOFERS

## TS-VR 15

TS-VR SERIES / DUAL COIL



**DUAL COIL**

1000 Watts Speaker Size: 15"

**SPECIFICATIONS**

POWER (R.M.S) 500 WATTS  
 FREQ. RESPONSE 20-1000HZ  
 SENSITIVITY 91dB  
 VOICE COIL 2.5" 4 LAYERS  
 MOUNTING DEPTH 180MM (7.07")  
 IMPEDANCE 2X4 OHMS  
 MAGNET 73 OZ



SPECIFICATIONS	TS-AR6	TS-AR8	TS-AR10	TS-AR12
----------------	--------	--------	---------	---------

WOOFER SIZE	6"	8"	10"	12"
POWER (R.M.P.D)	150 WATTS	300 WATTS	600 WATTS	750 WATTS
POWER (R.M.S)	75 WATTS	150 WATTS	300 WATTS	375 WATTS
FREQ. RESPONSE	60-3000HZ	30-2000HZ	28-1500HZ	25-1200HZ
SENSITIVITY	85dB	85dB	87dB	89dB
VOICE COIL	1.5" 4 LAYER	1.5" 4 LAYER	2" 4 LAYER	2.5" 4 LAYER
MOUNTING DEPTH	177MM (3.03")	116MM (4.56")	173MM (6.81")	153MM (6.02")
IMPEDANCE	4 OHMS	4 OHMS	4 OHMS	4 OHMS
STRONTIUM MAGNET	25 OZ	30 OZ	50 OZ	60 OZ



SPECIFICATIONS	TS-VR6	TS-VR8	TS-VR10	TSVR12
----------------	--------	--------	---------	--------

WOOFER SIZE	6"	8"	10"	12"
POWER (R.M.P.D)	150 WATTS	300 WATTS	600 WATTS	750 WATTS
POWER (R.M.S)	75 WATTS	150 WATTS	300 WATTS	375 WATTS
FREQUENCY RESPONSE	60-3000HZ	30-2000HZ	28-1500HZ	25-1200HZ
SENSITIVITY	85dB	85dB	87dB	89dB
VOICE COIL	1.5" 4 LAYER	1.5" 4 LAYER	2" 4 LAYER	2.5" 4 LAYER
MOUNTING DEPTH	177MM (3.03")	116MM (4.56")	173MM (6.81")	153MM (6.02")
IMPEDANCE	2X4 OHMS	2X4 OHMS	2X4 OHMS	2X4 OHMS
STRONTIUM MAGNET	25 OZ	30 OZ	50 OZ	60 OZ



# TWX-BD SERIES



**1600 Watts** Speaker Size: 15"

SPECIFICATIONS	TXX-BD1 15
WOOFER SIZE	15"
POWER (R.M.S)	1600 WATTS
POWER (R.M.S)	800 WATTS
FREQ. RESPONSE	20-800HZ
SENSITIVITY	96dB
VOICE COIL	3" 4 LAYER BLACK ALUM.
MOUNTING DEPTH	209MM (8 1/4")
IMPEDANCE	2X4 OHMS 4 LAYER
STRONTIUM MAGNET	75 OZ



### SPECIFICATIONS TXX-BD1 10

WOOFER SIZE	10"
POWER (R.M.S)	800 WATTS
POWER (R.M.S)	400 WATTS
FREQUENCY RESPONSE	26-1000HZ
SENSITIVITY	88DB
VOICE COIL	2.5" 4 LAYER BLACK ALUM.
MOUNTING DEPTH	158MM (6 1/4")
IMPEDANCE	2X4 OHMS 4 LAYER
STRONTIUM MAGNET	60 OZ



### SPECIFICATIONS TXX-BD1 12

WOOFER SIZE	12"
POWER (R.M.S)	1200 WATTS
POWER (R.M.S)	600 WATTS
FREQUENCY RESPONSE	22-900HZ
SENSITIVITY	92DB
VOICE COIL	2.5" 4 LAYER BLACK ALUM.
MOUNTING DEPTH	188MM (7 5/8")
IMPEDANCE	2X4 OHMS 4 LAYER
STRONTIUM MAGNET	60 OZ

# SUBWOOFERS

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## TXX-BD2 15

TXX-BD2 SERIES / DOUBLE STACK



**2000 Watts** Speaker Size: 15"

SPECIFICATIONS	
POWER (R.M.S)	1000 WATTS
FREQ. RESPONSE	20-800HZ
SENSITIVITY	96dB
VOICE COIL	3" BASV
MOUNTING DEPTH	209MM (8 1/4")
IMPEDANCE	2x4 OHMS 4 LAYER
STRONTIUM MAGNET	160 Oz

# SUBWOOFERS

TXX-BD3 SERIES / SINGLE STACK

## TXX-BD3 15



**2400 Watts** Speaker Size: 15"

SPECIFICATIONS	
WOOFER SIZE	15"
POWER (R.M.S)	1200 WATTS
FREQ. RESPONSE	18-800HZ
SENSITIVITY	97dB
VOICE COIL	3.3" 4 LAYER BLACK ALUM.
MOUNTING DEPTH	219MM (8-5/8")
IMPEDANCE	2x4 OHMS 4 LAYER
STRONTIUM MAGNET	220 Oz



### SPECIFICATIONS TXX-BD2 10

WOOFER SIZE	10"
POWER (P.M.P.O)	1200 WATTS
POWER (R.M.S)	600 WATTS
FREQUENCY RESPONSE	26-1000HZ
SENSITIVITY	88dB
VOICE COIL	2.5" BASV
MOUNTING DEPTH	158MM (6 1/14")
IMPEDANCE	2x4 OHMS 4 LAYER
STRONTIUM MAGNET	100 Oz



### SPECIFICATIONS TXX-BD2 12

WOOFER SIZE	12"
POWER (P.M.P.O)	1600 WATTS
POWER (R.M.S)	800 WATTS
FREQUENCY RESPONSE	22-900HZ
SENSITIVITY	92dB
VOICE COIL	2.5" 4 BASV
MOUNTING DEPTH	188MM (7 5/8")
IMPEDANCE	2x4 OHMS 4 LAYER
STRONTIUM MAGNET	150 Oz



### SPECIFICATIONS TXX-BD3 10

WOOFER SIZE	10"
POWER (P.M.P.O)	1400 WATTS
POWER (R.M.S)	700 WATTS
FREQUENCY RESPONSE	20-1000HZ
SENSITIVITY	89dB
VOICE COIL	2.5" TIL
MOUNTING DEPTH	173MM (6 3/16")
IMPEDANCE	2x4 OHMS 4 LAYER
STRONTIUM MAGNET	132 Oz



### SPECIFICATIONS TXX-BD3 12

WOOFER SIZE	12"
POWER (P.M.P.O)	1800 WATTS
POWER (R.M.S)	900 WATTS
FREQUENCY RESPONSE	20-900HZ
SENSITIVITY	93dB
VOICE COIL	3" TIL
MOUNTING DEPTH	193MM (7 5/8")
IMPEDANCE	2x4 OHMS 4 LAYER
STRONTIUM MAGNET	204 Oz



# SUBWOOFERS

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## TXX-APC 15BL

TXX-APC SERIES / EYE CANDY



eye  
CANDY



2000 Watts Speaker Size: 15"

SPECIFICATIONS	
WOOFER SIZE	2000 WATTS
POWER (R.M.S)	1000 WATTS
FREQ. RESPONSE	18-900HZ
SENSITIVITY	98.6DB
VOICE COIL	3" 4 LAYER
MOUNTING DEPTH	228MM (9")
IMPEDANCE	2X4 OHMS
STRONTIUM MAGNET	150 OZ

# SUBWOOFERS

## TXX-APC 15FG

TXX-APC SERIES / EYE CANDY



New Products  
2016

WOOFER SIZE	15"
POWER (R.M.RD)	1600 WATTS
POWER (R.M.S)	800 WATTS
FREQ. RESPONSE	25-800HZ
SENSITIVITY	96DB
VOICE COIL	3" 4 LAYER
MOUNTING DEPTH	178MM (7")
IMPEDANCE	2X4 OHMS
STRONTIUM MAGNET	120 OZ

TXX-APC 12FG Speaker Size: 12"

POWER (R.M.RD)	1600 WATTS
POWER (R.M.S)	800 WATTS
FREQ. RESPONSE	25-800HZ
SENSITIVITY	96DB
VOICE COIL	3" 4 LAYER
MOUNTING DEPTH	178MM (7")
IMPEDANCE	2X4 OHMS
STRONTIUM MAGNET	120 OZ



SPECIFICATIONS TXX-APC-12BL TXX-APC-12RD TXX-APC-15RD

WOOFER SIZE	12"	12"	15"
POWER (R.M.RD)	1600 WATTS	1600 WATTS	2000 WATTS
POWER (R.M.S)	800 WATTS	800 WATTS	1000 WATTS
FREQUENCY RESPONSE	23-1000HZ	23-1000HZ	18-900HZ
SENSITIVITY	96DB	96DB	98.6DB
VOICE COIL	3" 4 LAYER	3" 4 LAYER	3" 4 LAYER
MOUNTING DEPTH	186MM (7.32")	228MM (9")	228MM (9")
IMPEDANCE	2X4 OHMS	2X4 OHMS	2X4 OHMS
STRONTIUM MAGNET	120 OZ	120 OZ	150 OZ



SPECIFICATIONS TXX-APC-12BK

WOOFER SIZE	12"	12"
POWER (R.M.RD)	1600 WATTS	1600 WATTS
POWER (R.M.S)	800 WATTS	800 WATTS
FREQUENCY RESPONSE	25-800HZ	25-800HZ
SENSITIVITY	96DB	96DB
VOICE COIL	3" 4 LAYER	3" 4 LAYER
MOUNTING DEPTH	178MM (7")	178MM (7")
IMPEDANCE	2X4 OHMS	2X4 OHMS
MAGNET	120 OZ	120 OZ

# SUBWOOFERS

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## RK-TS-VR 15

REPLACEMENT KITS



**RK-TS-VR 6**  
6" TS-VR CAR SUBWOOFER  
REPLACEMENT KITS

**RK-TS-VR 8**  
8" TS-VR CAR SUBWOOFER  
REPLACEMENT KITS

**RK-TS-VR 10**  
10" TS-VR CAR SUBWOOFER  
REPLACEMENT KITS

**RK-TS-VR 12**  
12" TS-VR CAR SUBWOOFER  
REPLACEMENT KITS

**RK-TS-VR 15**  
15" TS-VR CAR SUBWOOFER  
REPLACEMENT KITS

replacement  
kits

Factory spec'd these Woofer replacement  
kits can be a life saver replacing burn outs  
and accidental mishaps

# SUBWOOFERS

## RK-TXX-APA Series

REPLACEMENT KITS



**RK-TXX-APA12 BL**  
12" TXX-APA12 BL  
CAR SUBWOOFER REPLACEMENT KITS

**RK-TXX-APA15 BL**  
15" TXX-APA15 BL  
CAR SUBWOOFER REPLACEMENT KITS

**RK-TXX-APA12 RD**  
12" TXX-APA12 RD  
CAR SUBWOOFER REPLACEMENT KITS

**RK-TXX-APA15 RD**  
15" TXX-APA15 RD  
CAR SUBWOOFER REPLACEMENT KITS



**RK-TS-AR 6**  
6" TS-AR CAR SUBWOOFER  
REPLACEMENT KITS

**RK-TS-AR 8**  
8" TS-AR CAR SUBWOOFER  
REPLACEMENT KITS

**RK-TS-AR 10**  
10" TS-AR CAR SUBWOOFER  
REPLACEMENT KITS

**RK-TS-AR 12**  
12" TS-AR CAR SUBWOOFER  
REPLACEMENT KITS

**RK-TS-AR 15**  
15" TS-AR CAR SUBWOOFER  
REPLACEMENT KITS



**RK-TXX-SQ1222**  
AUDIOPIPE REPAIR KIT FOR  
TXX-SQ1222

**RK-TXX-SQ1555**  
AUDIOPIPE REPAIR KIT FOR  
TXX-SQ1555

replacement  
kits

Factory spec'd these Woofer replacement  
kits can be a life saver replacing burn outs  
and accidental mishaps

**RK-TXX-BD3 10**  
10" TXX-BD3 10 CAR SUBWOOFER  
REPLACEMENT KITS

**RK-TXX-BD3 12**  
12" TXX-BD3 12 CAR SUBWOOFER  
REPLACEMENT KITS

**RK-TXX-BD3 15**  
15" TXX-BD3 15 CAR SUBWOOFER  
REPLACEMENT KITS



replacement  
kits

Factory spec'd these Woofer replacement  
kits can be a life saver replacing burn outs  
and accidental mishaps



# WOOFERS

HIGH PERFORMANCE CAR AUDIO PRODUCTS

**NWA-1593**

PROAUDIO SERIES 3"



**1400 Watts**    **Speaker Size: 15"**

**SPECIFICATIONS**  
 POWER (R.M.S) 700 WATTS  
 FREQ. RESPONSE 30-3500HZ  
 SENSITIVITY 94dB  
 VOICE COIL 3" 2-LAYERS  
 MOUNTING DEPTH 46MM (1.3/4")  
 IMPEDANCE 8 OHMS  
 MAGNET 90 Oz

# WOOFERS

PRO AUDIO SPEAKERS

**APLB-10**



**600 Watts**    **Speaker Size: 10"**

**SPECIFICATIONS**  
 POWER (R.M.S) 300 WATTS  
 FREQ. RESPONSE 50-4000HZ  
 SENSITIVITY 96dB  
 VOICE COIL 3" TL  
 MOUNTING DEPTH 11.1MM (4.37")  
 IMPEDANCE 8 OHMS  
 MAGNET 80 Oz



SPECIFICATIONS	NWA-1063	NWA-1263	NWA-1563
WOOFER SIZE	10"	12"	15"
POWER (R.M.P.D)	800 WATTS	1 000 WATTS	1 200 WATTS
POWER (R.M.S)	400 WATTS	500 WATTS	600 WATTS
FREQ. RESPONSE	35-4000HZ	35-4.5KHZ	30-3500HZ
SENSITIVITY	92dB	93dB	95dB
VOICE COIL KAPTON	3" 2-LAYERS	3" KAPTON 2-LAYERS	3" 2-LAYERS
MOUNTING DEPTH	104MM (4.1")	128MM (5.04")	144MM (5.67")
IMPEDANCE	8 OHMS	8 OHMS	8 OHMS
MAGNET	50 Oz	60 Oz	60 Oz



SPECIFICATIONS	APLB-12
WOOFER SIZE	12"
POWER (R.M.P.D)	800 WATTS
POWER (R.M.S)	400 WATTS
FREQ. RESPONSE	40-4000HZ
SENSITIVITY	98dB
VOICE COIL	3" TL
MOUNTING DEPTH	125MM (4.92")
IMPEDANCE	8 OHMS
MAGNET	80 Oz

SPECIFICATIONS	APLB-15
WOOFER SIZE	15"
POWER (R.M.P.D)	1 000 WATTS
POWER (R.M.S)	500 WATTS
FREQ. RESPONSE	35-3000HZ
SENSITIVITY	98dB
VOICE COIL	3" TL
MOUNTING DEPTH	156MM (6.14")
IMPEDANCE	8 OHMS
MAGNET	80 Oz

# WOOFERS

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## NWA-1560

PROAUDIO SPEAKERS



500 Watts Speaker Size: 15"

SPECIFICATIONS	250 WATTS
POWER (R.M.S)	30-3500HZ
FREQ. RESPONSE	95dB
SENSITIVITY	2.5" TL
VOICE COIL	1.44MM (5.67")
MOUNTING DEPTH	8 OHMS
IMPEDANCE	56 Oz
MAGNET	

# WOOFERS

PROAUDIO SUBWOOFERS

## NWA-15204D



1400 Watts Speaker Size: 15"

SPECIFICATIONS	700 WATTS
POWER (R.M.S)	28-2500HZ
FREQ. RESPONSE	98.3dB
SENSITIVITY	3" 2-LAYERS
VOICE COIL	1.47MM (5.79")
MOUNTING DEPTH	8 OHMS
IMPEDANCE	100 Oz
MAGNET	



### SPECIFICATIONS NWA-1060

WOOFER SIZE	10"
POWER (R.M.S)	500 WATTS
POWER (R.M.S)	250 WATTS
FREQ. RESPONSE	40-4000HZ
SENSITIVITY	95.2dB
VOICE COIL	2.5" 2-LAYERS
MOUNTING DEPTH	104MM (4.1")
IMPEDANCE	8 OHMS
MAGNET	50 Oz



### SPECIFICATIONS NWA-1260

WOOFER SIZE	12"
POWER (R.M.S)	800 WATTS
POWER (R.M.S)	400 WATTS
FREQ. RESPONSE	33-4000HZ
SENSITIVITY	94dB
VOICE COIL	2.5" 2-LAYERS
MOUNTING DEPTH	128MM (5.04")
IMPEDANCE	8 OHMS
MAGNET	56 Oz



### SPECIFICATIONS

WOOFER SIZE	8"
POWER (R.M.S)	200 WATTS
POWER (R.M.S)	100 WATTS
FREQUENCY RESPONSE	50-9000HZ
SENSITIVITY	90DB
VOICE COIL	1.5" 2-LAYERS
MOUNTING DEPTH	84MM (3.31")
IMPEDANCE	8 OHMS
MAGNET	30 Oz

### NWA-830CE

WOOFER SIZE	15"
POWER (R.M.S)	1400 WATTS
POWER (R.M.S)	700 WATTS
FREQ. RESPONSE	28-2500HZ
SENSITIVITY	98.3dB
VOICE COIL	31" 2-LAYERS
MOUNTING DEPTH	1.47MM (5.79")
IMPEDANCE	8 OHMS
MAGNET	100 Oz

### NWA-15104

WOOFER SIZE	18"
POWER (R.M.S)	1400 WATTS
POWER (R.M.S)	700 WATTS
FREQ. RESPONSE	24-2500HZ
SENSITIVITY	98.8dB
VOICE COIL	3" 2-LAYERS
MOUNTING DEPTH	181MM (7.13")
IMPEDANCE	8 OHMS
MAGNET	100 Oz

### NWA-18104

WOOFER SIZE	18"
POWER (R.M.S)	1400 WATTS
POWER (R.M.S)	700 WATTS
FREQ. RESPONSE	24-2500HZ
SENSITIVITY	98.8dB
VOICE COIL	3" 2-LAYERS
MOUNTING DEPTH	181MM (7.13")
IMPEDANCE	8 OHMS
MAGNET	100 Oz



# WOOFERS

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## NWA-18104

PROFESSIONAL PUBLIC ADDRESS WOOFERS

*Increase Power Handling*



**1400 Watts** Speaker Size: 18"

**SPECIFICATIONS**

POWER (R.M.S)	700 WATTS
FREQ. RESPONSE	28-3200HZ
SENSITIVITY	93dB
VOICE COIL	4" 2-LAYERS
MOUNTING DEPTH	188MM (7.40")
IMPEDANCE	8 OHMS
MAGNET	125 OZ

# WOOFERS

## NWA-15204

PROFESSIONAL PUBLIC ADDRESS WOOFERS

**Steel Basket**



**1400 Watts Power (P.M.P.O.)**  
PROFESSIONAL PUBLIC ADDRESS WOOFERS



**SPECIFICATIONS** NWA-1283

WOOFER SIZE	12"
POWER (R.M.P.D)	1000 WATTS
POWER (R.M.S)	500 WATTS
FREQ. RESPONSE	40-5000HZ
SENSITIVITY	94dB
VOICE COIL	3" 2-LAYERS
MOUNTING DEPTH	131MM (5.16")
IMPEDANCE	8 OHMS
MAGNET	75 OZ



**SPECIFICATIONS** NWA-15104

WOOFER SIZE	15"
POWER (R.M.P.D)	1200 WATTS
POWER (R.M.S)	600 WATTS
FREQ. RESPONSE	35-4000HZ
SENSITIVITY	93dB
VOICE COIL	4" 2-LAYERS
MOUNTING DEPTH	148MM (5.83")
IMPEDANCE	8 OHMS
MAGNET	100 OZ



**SPECIFICATIONS** NWA-15204

WOOFER SIZE	15"
POWER (R.M.P.D)	1400 WATTS
POWER (R.M.S)	700 WATTS
FREQ. RESPONSE	35-4000HZ
SENSITIVITY	95dB
VOICE COIL	2" 2-LAYERS
MOUNTING DEPTH	168MM (6.61")
IMPEDANCE	8 OHMS
MAGNET	200 OZ



**SPECIFICATIONS** NWA-18204

WOOFER SIZE	18"
POWER (R.M.P.D)	1600 WATTS
POWER (R.M.S)	800 WATTS
FREQ. RESPONSE	28-3200HZ
SENSITIVITY	95dB
VOICE COIL	4" 2-LAYERS
MOUNTING DEPTH	203MM (8")
IMPEDANCE	8 OHMS
MAGNET	800 OZ

## MUSIC

# lok on

*When heard for the first time on Audiopipe?*

In 2007 despite my studies in electronics and pro audio, it was then that my teacher referred me to the brand Audiopipe is an excellent and economic quality brand it really caught my attention.

*How long you been using Audiopipe products?*

Since 2007 I have been using the range of products offered by the brand in the Dominican market.

*Which Audiopipe product are you currently using and what products you used in the past?*

I have been using Audiopipe products for the past 8 years. I am currently using them for their excellent quality and affordable prices. Within the products I can mention the following:

**AMPLIFIERS:**  
APCL-15001D, APCL-18001D, APCL-2004 and APCL-3002

**SPEAKERS:**  
TS-VR12, TS-VR15 and my favorite TXX, as well BD2, BD3 in their different measurements.



DOMINICAN REPUBLIC DEALER



The tweeters and speakers have an excellent quality, the tweeter have good response and frequency with a very good quality.

Also the speakers APMB-6DR have an excellent design with a great dimension and space reduction to work with. Is excellent performance!

Crossover and Equalizer are an excellent quality. The equalizer has an excellent response with its nine bands from 50Hz to 16 kHz.

*Please tell us about your experience with Audiopipe:*

My experience with Audiopipe products has been and is extremely satisfactory without complaint. As already mentioned in the previous questions Audiopipe is more than a company, it's a trademark with excellent products and a very good price which is affordable for the Dominican market.



## LOKON MUSIC



# AMPLIFIERS

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## APBZ-2500.1

CLASS "D" MIDRANGE AMPLIFIERS

WITH REMOTE BASS KNOB



2500 Watts Made in KOREA

- 1 OHM STABLE DIGITAL
- FREQUENCY RESPONSE: 35HZ-10KHZ
- SIGNAL TO NOISE RATIO: 100dB
- DAMPING FACTOR: 200 <
- INPUT SENSITIVITY: 6V - 0.2V
- FILTER: 35HZ - 10KHZ @ 24dB / Oct
- SUBSONIC FILTER: 10HZ - 500HZ @ 24dB / Oct
- BASS BOOST: 0-9dB @ 45HZ
- PHASE: 0-180 DEGREE
- REMOTE LEVEL CONTROL IS INCLUDED
- DUAL 0 GAUGE POWER & GROUND TERMINAL
- WORKING VOLTAGE: 8.5V - 16V
- EXTERNAL FUSE RATING: 200A
- OUTPUT POWER AT 1 OHM: 2500W

New Products  
**2016**



### APBZ-4000.1

- 1 OHM STABLE DIGITAL MIDRANGE AMPLIFIERS
- FREQUENCY RESPONSE: 35HZ-10KHZ
- SIGNAL TO NOISE RATIO: 100dB
- DAMPING FACTOR: 200 <
- INPUT SENSITIVITY: 6V - 0.2V
- FILTER: 35HZ - 10KHZ @ 24dB / Oct
- SUBSONIC FILTER: 10HZ - 500HZ @ 24dB / Oct
- BASS BOOST: 0-9dB @ 45HZ
- PHASE: 0-180 DEGREE
- REMOTE LEVEL CONTROL IS INCLUDED
- DUAL 0 GAUGE POWER & GROUND TERMINAL
- WORKING VOLTAGE: 8.5V - 16V
- EXTERNAL FUSE RATING: 400A
- OUTPUT POWER AT 1 OHM: 4000W

**APBZ Series**  
Class D Midrange  
**AMPLIFIER**  
MADE IN KOREA

**Pipa**

# AMPLIFIERS

## APBZ-6000.1

NEW AMPLIFIERS LINE

**APBZ Series**  
Class D Midrange  
**AMPLIFIER**

MADE IN KOREA

- 1 OHM STABLE DIGITAL MIDRANGE AMPLIFIERS
- FREQUENCY RESPONSE: 35HZ-10KHZ
- SIGNAL TO NOISE RATIO: 100dB
- DAMPING FACTOR: 200 <
- INPUT SENSITIVITY: 6V - 0.2V
- FILTER: 35HZ - 10KHZ @ 24dB / Oct
- SUBSONIC FILTER: 10HZ - 500HZ @ 24dB / Oct
- BASS BOOST: 0-9dB @ 45HZ
- PHASE: 0-180 DEGREE
- REMOTE LEVEL CONTROL IS INCLUDED
- DUAL 0 GAUGE POWER & GROUND TERMINAL
- WORKING VOLTAGE: 8.5V - 16V
- EXTERNAL FUSE RATING: 600A
- OUTPUT POWER AT 1 OHM: 6000W

**Fortaleza**

# AMPLIFIERS

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## APNK-7002

APNK SERIES

New Products  
**2016**



**2000 WATTS**

**APNK SERIES**  
AMPLIFIERS

RMS AT 4 OHMS	700W x 2
MAX AT 4 OHMS	1400W x 2
AT 4 OHMS BRIDGED	2800W x 1
RMS AT 2 OHMS	1050W x 2
MIN. SPEAKER IMP.	2 OHMS
T.H.D.	0.04 %
FREQ. RESPONSE	10Hz ~35KHz, -10dB
INPUT SENSITIVITY	200mV~8V
S/N RATIO	>100dB
CHANNEL SEPARATION	>60dB
CROSSOVER	50HZ~120HZ
(LOW PASS FILTER)	
CROSSOVER	50HZ~750KHZ
(HIGH PASS FILTER)	
BASS BOOST CONTROL	0~+18dB
DIMENSIONS (WxHxL)	25.08"x11.77"x2.93"

NEW AMPLIFIERS LINE


## APNK-40001

New Products  
**2016**

RMS @ 4 OHM	1550W x 1
RMS @ 2 OHM	2650W x 1
RMS @ 1 OHM	4000W x 1
IMPEDANCE	1 OHM
T.H.D.	0.1 %
FREQUENCY RESPONSE	15HZ ~ 250HZ
INPUT SENSITIVITY	300mV~8V
S/N RATIO	>100dB
PHASE SHIFT	0°~186°
CROSSOVER	50HZ~250HZ
(LOW PASS FILTER)	
SUBSONIC	15HZ~40HZ
BASS BOOST CONTROL	0~+18DB
DIMENSION (WxHxL)	25.08"x11.77"x2.93"

## APNK-2504

New Products  
**2016**

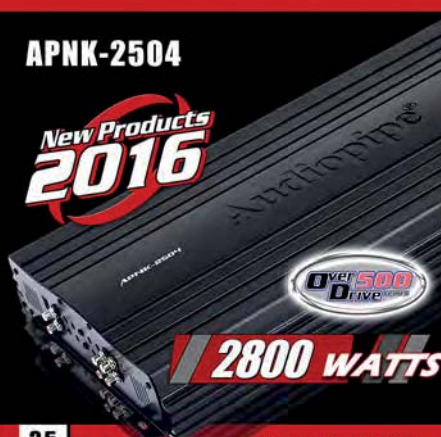

**2800 WATTS**

RMS AT 4 OHMS	250W x 4
MAX AT 4 OHMS	500W x 4
AT 4 OHMS BRIDGED	1000W x 2
RMS AT 2 OHMS	350W x 4
MIN. SPEAKER IMP.	2 OHMS
T.H.D.	0.04 %
FREQ. RESPONSE	10Hz ~35KHz, -10dB
INPUT SENSITIVITY	200mV~8V
S/N RATIO	>90dB
CHANNEL SEPARATION	>50dB
CROSSOVER	50HZ~120HZ
(LOW PASS FILTER)	
CROSSOVER	50HZ~750KHZ
(HIGH PASS FILTER)	
BASS BOOST CONTROL	0~+18dB
DIMENSIONS (WxHxL)	23.15"x11.77"x2.93"



**4000 WATTS**

**APNK SERIES**  
AMPLIFIERS



## APMA-4400

COMPACT MINI DESIGN AMPLIFIERS

Compact MINI Design  
AMPLIFIERS



New Products  
2016

### APMA-4400

200 Watts 4 Channels

- 4 x 50W RMS @ 14.4V
- FRD CHIP TECHNOLOGY
- UP TO 2Ω STABLE
- AUTO TURN ON/OFF
- UP TO 4V LOW LEVEL INPUT
- UP TO 15V HIGH LEVEL INPUT
- STREET SERIES PLUG PREWIRED
- UP TO 8GA POWER TERMINAL
- DUAL SIDE SOLID PCB WITH SMD
- HEAVY DUTY STACKABLE HEATSINK
- DIMENSIONS: 5.5" x 3.7" x 1.7" (140 x 94 x 44mm)

Compact MINI Design  
AMPLIFIERS



New Products  
2016

### APMA-2100

200 Watts 2 Channels

- 2 x 100W RMS @ 14.4V
- FRD CHIP TECHNOLOGY
- UP TO 2Ω STABLE
- AUTO TURN ON/OFF
- UP TO 300HZ LOW PASS
- UP TO 4V LOW LEVEL INPUT
- STREET SERIES PLUG PREWIRED
- UP TO 8GA POWER TERMINAL
- DUAL SIDE SOLID PCB WITH SMD
- HEAVY DUTY STACKABLE HEATSINK
- DIMENSIONS: 5.5" x 3.7" x 1.7" (140 x 94 x 44mm)

## COMPACT MINI DESIGN

FULL RANGE CLASS "D"

### APMOTO-4450

200 Watts 4 Channels

- 4 x 50W RMS @ 14.4V
- FRD CHIP TECHNOLOGY
- UP TO 2Ω STABLE
- AUTO TURN ON/OFF
- UP TO 4V LOW LEVEL INPUT
- UP TO 15V HIGH LEVEL INPUT
- STREET SERIES PLUG PREWIRED
- UP TO 8GA POWER TERMINAL
- DUAL SIDE SOLID PCB WITH SMD
- HEAVY DUTY STACKABLE HEATSINK
- DIMENSIONS: 5.5" x 3.7" x 1.7" (140 x 94 x 44mm)

New Products  
2016



### APMOTO-2150

200 Watts 2 Channels

- 2 x 100W RMS @ 14.4V
- FRD CHIP TECHNOLOGY
- UP TO 2Ω STABLE
- AUTO TURN ON/OFF
- UP TO 300HZ LOW PASS
- UP TO 60HZ SUBSONIC (HP)
- UP TO 4V LOW LEVEL INPUT
- STREET SERIES PLUG PREWIRED
- UP TO 8GA POWER TERMINAL
- DUAL SIDE SOLID PCB WITH SMD
- HEAVY DUTY STACKABLE HEATSINK
- DIMENSIONS: 5.5" x 3.7" x 1.7" (140 x 94 x 44mm)

New Products  
2016



Compact MINI Design  
AMPLIFIERS

# AMPLIFIERS

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## AQX-2000.1

CLASS "D" ELITE CAR AMPLIFIERS

2000 WATTS



- RMS @ 4 OHM (<1% DISTORTION): 742W
- RMS @ 2 OHM (<1% DISTORTION): 1300W
- RMS @ 1 OHM (<1% DISTORTION): 1892W
- INPUT LEVEL: 0.2-5V
- FREQUENCY RESPONSE: 5Hz - 180Hz
- LPF: 40Hz - 180Hz
- SUBSONIC FILTER: 5-50Hz
- BASS BOOST FREQUENCY: 30-85Hz
- BASS BOOST LEVEL: 0-120dB
- SIGNAL NOISE RATIO: <70%
- BEST EFFICIENCY: >85%
- MINIMUM LOAD: 1 OHM
- OPTIONAL REMOTE: YES
- OVERLOAD PROTECT SYSTEM: YES
- SHORT CIRCUIT TEST (MAX. POWER): PASS
- OVERHEAT PROTECT TEMPERATURE: 80°C / 176°F
- COMPONENTS & PCB: SMT & DOUBLE SIDED BOARD
- TRANSPARENT ISOLATION CONNECTOR: YES
- DIMENSION (WxHxD): 250x70x41.6,5MM

**AQX**  
AMPLIFIERS



# AMPLIFIERS

AQX CAR AMPLIFIERS

## AQX-360.4




2500 Watts Class AB Hi-End Mosfet

- 4 CHANNEL
- 1Ω LOAD STABLE
- INPUT LEVEL: 0.2-6V
- THD: <0.08%
- BASS BOOST: +15dB @45Hz
- FREQ. RESPONSE: 20Hz - 30KHz
- 4 CHANNELS @ 4 OHMS 125 WATTS
- 4 CHANNELS @ 2 OHMS 180 WATTS
- 2 CHANNELS @ 4 OHMS 360 WATTS

## AQX-660.2

2000 WATTS

- 2 CHANNEL HIGH END CAR AMPLIFIER
- RMS @ 4OHM (<1% DISTORTION): 2 X 248W
  - RMS @ 2OHM (<1% DISTORTION): 2 X 445W
  - FREQUENCY RESPONSE: 5Hz - 30kHz
  - SIGNAL TO NOISE RATIO: <0.05%
  - INPUT SENSITIVITY LEVEL: 0.2-6V
  - LPF: 50Hz - 500Hz
  - HPF: 50Hz - 1.2kHz
  - CURRENT DRAW: 80A
  - MINIMUM LOAD: 2 OHM
  - OPTIONAL REMOTE: YES
  - OVERLOAD PROTECT SYSTEM: YES
  - SHORT CIRCUIT TEST (MAX. POWER): YES
  - OVERHEAT PROTECT TEMPERATURE: 80°C / 176°F
  - COMPONENTS & PCB: SMT & DOUBLE SIDED BOARD
  - DIMENSION (WxHxD): 250x70x39,5MM




## AQX-3000.1

3000 WATTS

- RMS @ 4 OHM (<1% DISTORTION): 1100W
- RMS @ 2 OHM (<1% DISTORTION): 1950W
- RMS @ 1 OHM (<1% DISTORTION): 3025W
- INPUT LEVEL: 0.2 - 6V
- FREQUENCY RESPONSE: 5 - 270Hz
- LPF: 35 - 270Hz
- SUBSONIC FILTER: 15 - 35Hz
- BASS BOOST LEVEL: 0 - 90dB
- THD @ 4 OHM 100% 30% RATED POWER: <0.2%
- SIGNAL NOISE RATIO: >70dB
- BEST EFFICIENCY: >85%
- MINIMUM LOAD: 1 OHM
- BRIDGEABLE WITH SAME AMPLIFIER: YES
- OVERLOAD PROTECT SYSTEM: YES
- SHORT CIRCUIT TEST (MAX. POWER): PASS
- OVERHEAT PROTECT TEMPERATURE: 80°C / 176°F
- COMPONENTS & PCB: SMT & DOUBLE SIDED BOARD
- TRANSPARENT ISOLATION CONNECTOR: YES
- DIMENSION (W x H x D): 250 x 70 x 46.4 (MM)

**AQX**  
AMPLIFIERS

New Products  
**2016**

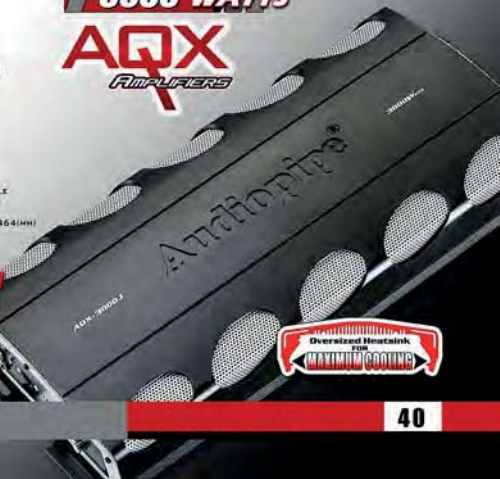



# AMPLIFIERS

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## APMI-600

CLASS "D" MOSFET CAR AMPLIFIERS

MINI  
amplifiers  
MINI



New Products  
2016



### 600 Watts Mini Design

- RMS @ 4 OHM (1% DISTORTION): 268W
- RMS @ 2 OHM (1% DISTORTION): 360W
- RMS @ 1 OHM (1% DISTORTION): 540W
- INPUT LEVEL: 0.2-5V
- FREQUENCY RESPONSE: 8-180KHZ
- LPF: 40-180HZ
- SUBSONIC FILTER: 5-50HZ
- SIGNAL NOISE RATIO: >70DB
- BEST EFFICIENCY: >95%
- BASS REMOTE CONTROL INCLUDED
- MINIMUM LOAD: 1 OHM
- COMPONENTS & PCB: DOUBLE SIDE BOARD
- TRANSPARENT INSULATION CONNECTOR: YES
- DIMENSION(LXWXHD): 165X56X225.5MM

## APMI-4090



New Products  
2016

1300 WATTS

- RMS @ 4 OHM (1% DISTORTION): 4 x 100W
- RMS @ 2 OHM (1% DISTORTION): 4 x 130W
- MAXIMUM POWER OUTPUT: 2 x 300W
- FREQUENCY RESPONSE: 10-20KHZ
- SIGNAL NOISE RATIO: >80DB
- INPUT SENSITIVITY LEVEL: 0.2-6V
- LPF: 50-250HZ
- HPF: 50-250KHZ
- CURRENT DRAW: 75A
- MINIMUM LOAD: 2 OHM
- COMPONENTS & PCB: DOUBLE SIDE BOARD
- DIMENSION(LXWXHD): 165X56X251.5MM

# AMPLIFIERS

## APMI-55100



### 1600 Watts Mini Design

- |                   |                                    |
|-------------------|------------------------------------|
| CHANNEL           | 5 CHANNEL                          |
| RMS @ 4 OHM       | 4 x 66+225W                        |
| RMS @ 2 OHM       | 4 x 98+338W                        |
| FREQ. RESPONSE    | 20HZ - 120KHZ                      |
| S/N RATIO         | >80DB                              |
| INPUT SENSITIVITY | 0.2V - 5V                          |
| THD               | <0.05%                             |
| HPF               | 50HZ - 1.2KHZ                      |
| SUBSONIC FILTER   | DHZ - 50HZ                         |
| DIMENSION (LXWXH) | 165X56X276.5MM<br>6.49X2.20X10.88" |

### SPECIFICATIONS

#### APMI-1300

**POWER AMPLIFIER** 1000 WATTS POWER  
**CHANNEL** 1 CHANNEL  
**FREQ. RESPONSE** 8HZ - 180KHZ  
**S/N RATIO** >70DB  
**INPUT SENSITIVITY** 0.2V - 5V  
**THD** <0.15%  
**LPF** 40HZ - 180KHZ  
**SUBSONIC FILTER** 5HZ - 50HZ  
**OUTPOWER (RMS)** 1 CHANNEL 376W @ 4 OHM  
 1 CHANNEL 648W @ 2 OHM  
 1 CHANNEL 1024W @ 1 OHM  
**DIMENSION (LXWXHD)** 165X56X266.5MM  
 6.49X2.20X10.49"

#### APMI-1500

**POWER AMPLIFIER** 1500 WATTS POWER  
**CHANNEL** 1 CHANNEL  
**FREQ. RESPONSE** 8HZ - 180KHZ  
**S/N RATIO** >70DB  
**INPUT SENSITIVITY** 0.2V - 5V  
**THD** <0.2%  
**LPF** 40HZ - 180KHZ  
**SUBSONIC FILTER** 5HZ - 50HZ  
**OUTPOWER (RMS)** 1 CHANNEL 540W @ 4 OHM  
 1 CHANNEL 954W @ 2 OHM  
 1 CHANNEL 1414W @ 1 OHM  
**DIMENSION (LXWXHD)** 165X56X341.65MM  
 6.49X2.20X13.44"

#### APMI-2000

**POWER AMPLIFIER** 2000 WATTS POWER  
**CHANNEL** 1 CHANNEL  
**FREQ. RESPONSE** 8HZ - 180KHZ  
**S/N RATIO** >70DB  
**INPUT SENSITIVITY** 0.2V - 5V  
**THD** <0.2%  
**LPF** 40HZ - 180KHZ  
**SUBSONIC FILTER** 5HZ - 50HZ  
**OUTPOWER (RMS)** 1 CHANNEL 770W @ 4 OHM  
 1 CHANNEL 1300W @ 2 OHM  
 1 CHANNEL 1944W @ 1 OHM  
**DIMENSION (LXWXHD)** 165X56X416.5MM  
 6.49X2.20X16.39"

### SPECIFICATIONS

#### APMI-2075

**POWER AMPLIFIER** 1000 WATTS POWER  
**CHANNEL** 2 CHANNEL  
**FREQUENCY RESPONSE** 10HZ - 20KHZ  
**SIGNAL TO NOISE RATIO** >80DB  
**BASS BOOST** 0.2V - 6V  
**INPUT SENSITIVITY** <0.05%  
**SPKAKER IMPEDANCE** 50HZ - 500KHZ  
**TOTAL HARMONIC DIST** DHZ - 50HZ  
**OUTPUT POWER (RMS)** STEREO 2X75W @ 4 OHM  
 STEREO 2X100W @ 2 OHM  
 BRIDGE 1X150W @ 4 OHM  
**DIMENSION (LXWXH)** 165X56X175MM  
 6.49X2.20X6.89"

#### APMI-2125

**POWER AMPLIFIER** 1200 WATTS POWER  
**CHANNEL** 4 CHANNEL  
**FREQ. RESPONSE** 10HZ - 20KHZ  
**S/N RATIO** >80DB  
**INPUT SENSITIVITY** <0.05%  
**SPKAKER IMPEDANCE** 50HZ - 500KHZ  
**TOTAL HARMONIC DIST** DHZ - 50HZ  
**OUTPUT POWER (RMS)** STEREO 2X139W @ 4 OHM  
 STEREO 2X203W @ 2 OHM  
 BRIDGE 1X250W @ 4 OHM  
**DIMENSION (LXWXH)** 165X56X201MM  
 6.49X2.20X7.91"

#### APMI-4080

**POWER AMPLIFIER** 1200 WATTS POWER  
**CHANNEL** 4 CHANNEL  
**FREQ. RESPONSE** 10HZ - 20KHZ  
**S/N RATIO** >80DB  
**INPUT SENSITIVITY** <0.05%  
**SPKAKER IMPEDANCE** 50HZ - 500KHZ  
**TOTAL HARMONIC DIST** DHZ - 50HZ  
**OUTPUT POWER (RMS)** STEREO 4X78W @ 4 OHM  
 STEREO 4X117W @ 2 OHM  
 BRIDGE 2X150W @ 4 OHM  
**DIMENSION (LXWXH)** 165X56X211MM  
 6.49X2.20X8.30"

1000 WATTS



APMI-1300

1500 WATTS



APMI-1500

2000 WATTS



APMI-2000

1000 WATTS



APMI-2075

1200 WATTS



APMI-2125

1200 WATTS



APMI-4080

# AMPLIFIERS

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## APCL-6004

APCL SERIES



- \* CLASS AB POWER AMPLIFIER
- \* BUILT-IN VARIABLE HIGH PASS & LOW PASS CROSSOVER
- \* RCA LINE INPUT/OUTPUT JACKS
- \* ELECTRONIC PROTECTION CIRCUITRY TO PROTECT THE AMPLIFIER FROM SHORT CIRCUIT, DC OFFSET & THERMAL OVERLOAD
- \* REMOTE SUB-WOOFER VOLUME CONTROL

WITH REMOTE BASS KNOB



2500 Watts

Consumer Line

CHANNEL  
FREQUENCY RESPONSE  
SIGNAL TO NOISE RATIO  
BASS BOOST  
INPUT SENSITIVITY  
SPEAKER IMPEDANCE  
TOTAL HARMONIC DIST  
OUTPUT POWER (RMS)

4 CHANNEL CLASS AB  
20HZ - 20KHZ  
95dB  
0-180B @ 45HZ  
0.25V - 5V  
2Ω TO 4Ω  
<0.05%  
STEREO 4 CH-150W x 4@4Ω  
STEREO 4 CH-200W x 4@2Ω  
BRIDGE 2 CH-600W x 2@4Ω  
384X176X55MM  
15.1X7X2.2"

DIMENSION (LXWXH)

# AMPLIFIERS

APCL SERIES

## APCL-6002

WITH REMOTE BASS KNOB



- \* BUILT-IN VARIABLE HIGH PASS & LOW PASS CROSSOVER
- \* RCA LINE INPUT/OUTPUT JACKS
- \* ELECTRONIC PROTECTION CIRCUITRY TO PROTECT THE AMPLIFIER FROM SHORT CIRCUIT, DC OFFSET & THERMAL OVERLOAD
- \* REMOTE SUB-WOOFER VOLUME CONTROL

2000 Watts

Class AB Power Amplifiers

CHANNEL  
FREQUENCY RESPONSE  
SIGNAL TO NOISE RATIO  
BASS BOOST  
INPUT SENSITIVITY  
SPEAKER IMPEDANCE  
TOTAL HARMONIC DIST  
OUTPUT POWER (RMS)

2 CHANNEL CLASS AB  
10HZ - 30KHZ  
80dB  
0-180B @ 45HZ  
0.25V - 5V  
2Ω TO 4Ω  
<0.05%  
STEREO 2 CH-297W x 2@4Ω  
STEREO 2 CH-496W x 2@2Ω  
BRIDGE 1 CH-960W x 1@4Ω  
698X176X55MM  
27.4X7X2.2"

DIMENSION (LXWXH)

### SPECIFICATIONS

APCL-1004

APCL-1504

APCL-2004

#### POWER AMPLIFIER

1000 WATTS

1500 WATTS

2000 WATTS

CHANNEL  
FREQUENCY RESPONSE  
SIGNAL TO NOISE RATIO  
BASS BOOST  
INPUT SENSITIVITY  
SPEAKER IMPEDANCE  
TOTAL HARMONIC DIST  
OUTPUT POWER (RMS)

4 CHANNEL CLASS AB  
20HZ - 20KHZ  
95dB  
0-180B @ 45HZ  
0.25V - 5V  
2Ω TO 4Ω  
<0.05%  
STEREO 4 CH-50W x 4@4Ω  
STEREO 4 CH-100W x 2@2Ω  
BRIDGE 2 CH-225W x 2@4Ω

4 CHANNEL CLASS AB  
20HZ - 20KHZ  
95dB  
0-180B @ 45HZ  
0.25V - 5V  
2Ω TO 4Ω  
<0.05%  
STEREO 4 CH-75W x 4@4Ω  
STEREO 4 CH-125W x 4@2Ω  
BRIDGE 2 CH-225W x 2@4Ω

4 CHANNEL CLASS AB  
20HZ - 20KHZ  
95dB  
0-180B @ 45HZ  
0.25V - 5V  
2Ω TO 4Ω  
<0.05%  
STEREO 4 CH-100W x 4@4Ω  
STEREO 4 CH-150W x 4@2Ω  
BRIDGE 2 CH-300W x 2@4Ω

#### DIMENSION (LXWXH)

333X176X55MM  
13.1X7X2.2"

382X176X55MM  
15X7X2.2"

384X176X55MM  
15.1X7X2.2"



APCL-1004



APCL-1504



APCL-2004

### SPECIFICATIONS

APCL-1002

APCL-2002

APCL-3002

#### POWER AMPLIFIER

500 WATTS

1000 WATTS

1500 WATTS

CHANNEL  
FREQUENCY RESPONSE  
SIGNAL TO NOISE RATIO  
BASS BOOST  
INPUT SENSITIVITY  
SPEAKER IMPEDANCE  
TOTAL HARMONIC DIST  
OUTPUT POWER (RMS)

2 CHANNEL CLASS AB  
20HZ - 20KHZ  
100dB  
0-180B @ 45HZ  
0.25V - 5V  
2Ω TO 4Ω  
<0.05%  
STEREO 2 CH-50W x 2@4Ω  
STEREO 2 CH-100W x 2@2Ω  
BRIDGE 1 CH-200W x 1@4Ω

2 CHANNEL CLASS AB  
20HZ - 20KHZ  
100dB  
0-180B @ 45HZ  
0.25V - 5V  
2Ω TO 4Ω  
<0.05%  
STEREO 2 CH-100W x 2@4Ω  
STEREO 2 CH-125W x 2@2Ω  
BRIDGE 1 CH-300W x 1@4Ω

2 CHANNEL CLASS AB  
20HZ - 20KHZ  
100dB  
0-180B @ 45HZ  
0.25V - 5V  
2Ω TO 4Ω  
<0.05%  
STEREO 2 CH-150W x 2@4Ω  
STEREO 2 CH-300W x 2@2Ω  
BRIDGE 1 CH-600W x 1@4Ω

#### DIMENSION (LXWXH)

224X176X55MM  
8.8X7X2.2"

260X176X55MM  
10.2X7X2.2"

382X176X55MM  
15X7X2.2"



APCL-1002



APCL-2002



APCL-3002



# AMPLIFIERS

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## APCL-15001D

APCL SERIES

NOW WITH UP TO  
**16V**  
INPUT CAPABILITY



Oversized Toroid stabilizes voltage

Angled terminal allows for wires to easily conceal



WITH REMOTE BASS KNOB

1500 Watts

Consumer Line

CHANNEL	1 CHANNEL CLASS D
FREQUENCY RESPONSE	8HZ - 180HZ
SIGNAL TO NOISE RATIO	>70dB
BASS BOOST	30-80HZ
INPUT SENSITIVITY	0.2-5V
SPEAKER IMPEDANCE	MIN 1Ω
TOTAL HARMONIC DIST	<0.15%
OUTPUT POWER (RMS)	1 CHANNEL @ 4Ω - 600W 1 CHANNEL @ 2Ω - 950W 1 CHANNEL @ 1Ω - 1500W
DIMENSION (LxWxH)	357x176x55MM 1.4x7x2.2"

# AMPLIFIERS

APCL SERIES

## APCL-30001D



3000 Watts

Class D Power Amplifiers

CHANNEL	1 CHANNEL CLASS D
FREQUENCY RESPONSE	8HZ - 180HZ
SIGNAL TO NOISE RATIO	>70dB
BASS BOOST	30-80HZ
INPUT SENSITIVITY	0.2-5V
SUBSONIC FILTER	5-50HZ
LOW PASS FILTER	40-180HZ
OUTPUT POWER (RMS)	1 CHANNEL @ 4Ω - 1800W 1 CHANNEL @ 2Ω - 3000W 1 CHANNEL @ 1Ω - N/A
DIMENSION (LxWxH)	710x176x55MM 27.9x7x2.2"

### SPECIFICATIONS

#### APCL-10001D

POWER AMPLIFIER  
CHANNEL  
FREQUENCY RESPONSE  
SIGNAL TO NOISE RATIO  
BASS BOOST  
INPUT SENSITIVITY  
SPEAKER IMPEDANCE  
TOTAL HARMONIC DIST  
OUTPUT POWER (RMS)

1000 WATTS  
1 CHANNEL CLASS D  
8HZ - 180HZ  
>70dB  
30-80HZ  
0.2-5V  
MIN 1Ω  
<0.15%

#### DIMENSION (LxWxH)

288x176x55MM  
11.3x7x2.2"

#### APCL-18001D

1800 WATTS  
1 CHANNEL CLASS D  
8HZ - 180HZ  
>70dB  
30-80HZ  
0.2-5V  
MIN 1Ω  
<0.15%

1 CHANNEL @ 4Ω - 750W  
1 CHANNEL @ 2Ω - 1100W  
1 CHANNEL @ 1Ω - 1800W  
433x176x55MM  
17x7x2.2"

- CLASS-D POWER AMPLIFIER
- OVERLOAD PROTECTION
- OVERHEAT PROTECTION
- VARIABLE LOW PASS
- ELECTRONIC CROSSOVER
- VARIABLE SUBSONIC FILTER
- REMOTE SUB-WOOFER VOLUME CONTROL
- BUILT-IN VARIABLE PHASE SHIFT



1000 WATTS



1800 WATTS



1 CHANNEL  
3000Watts x 1 @ 2 Ohm



WITH REMOTE BASS KNOB

# EQUALIZERS

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## EQ-707X

EQUALIZERS & CROSSOVERS



# 7 Band EQUALIZER

### 7 BAND PARAMETRIC EQ WITH SUBWOOFER OUTPUT

- 7 BAND PARAMETRIC: 50HZ, 315HZ, 750HZ, 2.2KHZ, 6KHZ, 16KHZ, 12.6KHZ.
- IN-DASH EQUALIZER & PRE-AMP.
- ADJUSTABLE SUBWOOFER FREQUENCY: 60HZ-90HZ.
- ADJUSTABLE GAIN WITH UP TO 7V OUTPUT.
- INPUT SENSITIVITY: ADJUSTABLE 200MV - 3.5V RMS.
- T.H.D.: 0.05%.
- OPERATING VOLTAGE: 11-15V NEGATIVE GROUND.
- UNIVERSAL HALF-DIN CHASSIS FOR EASY OF INSTALLATION.
- ACTIVE GAIN PRE-AMPLIFIERS WITH ADJUSTABLE INPUT SENSITIVITY.
- LOW NOISE Bi-FET OP-AMP DESIGN YIELDS MINIMUM DISTORTION.
- ON-BOARD 30V Bi-POLAR SWITCHING POWER SUPPLY.
- SUBWOOFER OUTPUT AND LEVEL CONTROL.
- GOLD-PLATED RCA INPUT CONNECTORS.

## EQ-908X

### 9 BAND GRAPHIC EQUALIZER WITH SUBWOOFER OUTPUT

- 9 BAND PARAMETRIC: 50HZ, 125HZ, 250HZ, 500HZ, 1KHZ, 2KHZ, 4KHZ, 8KHZ, 16KHZ.
- IN-DASH EQUALIZER & PRE-AMP.
- ADJUSTABLE SUBWOOFER FREQUENCY: 60HZ-90HZ.
- ADJUSTABLE GAIN WITH UP TO 9V OUTPUT.
- INPUT SENSITIVITY: ADJUSTABLE 200MV - 3.5V RMS.
- T.H.D.: 0.05%.
- OPERATING VOLTAGE: 11-15V NEGATIVE GROUND.
- UNIVERSAL HALF-DIN CHASSIS FOR EASY OF INSTALLATION.
- ACTIVE GAIN PRE-AMPLIFIERS WITH ADJUSTABLE INPUT SENSITIVITY.
- LOW NOISE Bi-FET OP-AMP DESIGN YIELDS MINIMUM DISTORTION.
- ON-BOARD 30V Bi-POLAR SWITCHING POWER SUPPLY.
- SUBWOOFER OUTPUT AND LEVEL CONTROL.
- GOLD-PLATED RCA INPUT CONNECTORS.



# 9 Band EQUALIZER

## EQ-400BT

### 4-BAND EQUALIZER

- GRAPHIC CENTER FREQUENCIES: 150HZ, 400HZ, 2.5KHZ, 15KHZ
- BOOST/CUT:  $\pm 12\text{DB}$
- S/N RATIO: 100DB
- INPUT: 3V; OUTPUT: 9V
- IMPEDANCE: INPUT: 20K $\Omega$ ; OUTPUT: 2 $\Omega$
- T.H.D.: 0.005%
- FREQ. RESP: 10HZ-30KHZ
- POWER 11V-15V DC



# New Products 2016

# 9V

## XV-8BXP

### 4-WAY CROSSOVER WITH BANDPASS CONTROL

- HIGH PASS: 400HZ-10KHZ (12 DB/8)
- LOW PASS: 700HZ-12.5KHZ (12 DB/8)
- HIGH PASS: 25HZ-30KHZ (12 DB/8)
- LOW PASS: 300HZ-10KHZ (12 DB/8)
- LOW PASS: 50HZ-250HZ (12 DB/8)
- BASS BOOST: 150HZ-110HZ (0-+12DB; 45HZ)
- MAXIMUM VOLTAGE: INPUT: 4V; OUTPUT: 9V
- SIGNAL/NOISE RATIO: >90DB
- ADJUSTABLE LOUDSPEAKER FREQUENCY
- IMPEDANCE: INPUT: 10K $\Omega$ ; OUTPUT: 50 $\Omega$
- T.H.D.: < 0.02%
- CHANNELS SEPARATION: >50DB
- FREQUENCY RESPONSE: 20HZ-20KHZ
- POWER: 10V-16V DC
- CURRENT CONSUMPTION: 200MA
- DIMENSION: 8.9"x6.2"x1.3" (33x22.5x1.60MM)
- WEIGHT: 66G



# New Products 2016

# ADJUSTABLE LOUDSPEAKER FREQUENCY

# CROSSOVERS

## XV-10BXP

# New Products 2016

- HIGH PASS: 400HZ-10KHZ (12 DB/8A)
- MID HIGH PASS: 150HZ-12.5KHZ (12 DB/8A)
- MID LOW PASS: 70HZ-10KHZ (12 DB/8A)
- LOW PASS: 50HZ-250HZ (12 DB/8A)
- BASS BOOST: 125HZ-110HZ (0-+12DB; 60HZ)
- MAXIMUM VOLTAGE: INPUT: 4V; OUTPUT: 9V
- SIGNAL/NOISE RATIO: >90DB
- IMPEDANCE: INPUT: 10K $\Omega$ ; OUTPUT: 50 $\Omega$
- T.H.D.: < 0.02%
- CHANNELS SEPARATION: > 80DB
- FREQUENCY RESPONSE: 20HZ-20KHZ
- POWER: 10V-16V DC
- CURRENT CONSUMPTION: 250MA
- DIMENSION: 8.9"x10.4"x1.3" (33x26.4x1.60 MM)
- WEIGHT: 1.7 Lb (780G)



## XV-3BXP

### 3-WAY CROSSOVER WITH LINE DRIVER

- POWER SOURCE: 14.4V DC
- INPUT CURRENT: 0.5A MAX.
- FREQUENCY RESPONSE: 10HZ-30KHZ $\pm 3\text{DB}$
- S/N RATIO: >95DB
- SEPARATION: 60DB
- OUTPUT VOLTAGE LEVEL: 8V MAX
- INPUT IMPEDANCE: >10K $\Omega$
- SUBWOOFER: 50-160HZ
- REAR HIGH PASS: 50-800HZ
- FRONT HIGH PASS: 50-800HZ





## DAVID THORNTON



2016 marks David Thornton's 4th year at Audiopipe! He began in late January 2012 and took over as technical support supervisor. Over the years he has grown to also offer assistance to the technicians, salespeople and the graphics department.



Dave handles all Audiopipe consumer returns and even personally bench tests all repaired amplifiers thus ensuring all functions and settings are in full working condition before returning back to each customer. In addition, he puts all these amplifiers through a rigorous stress test to be sure all internal components are operating correctly and the amp's overload and overheat protections are functioning as they should. If the amp passes then it is good to go!

In order to streamline and simplify our returns process here at Audiopipe, Dave has worked closely with the webmaster to introduce an online RMA ticket system which allows an RMA# to be generated automatically for a customer's return.

Once the product has been received, the customer is then able to check the real time status of their return request online at Audiopipe.com using the RMA number they were given upon creating the ticket. This has allowed for an overall smoother return process and better communication to the customer.

Dave is also a fellow car audio and SPL enthusiast and loves to be involved in anything audio related, he has over 10 years of hands-on experience testing and using the Audiopipe brand. He is knowledgeable on all Audiopipe's product and is here to help you out in any way possible!



## CSL-1602

COAXIAL CAR SPEAKERS



### Injection Cone with Rubber Edge

SIZE	6" 3-WAY
POWER (R.M.P.D)	250 WATTS
POWER (R.M.S)	125 WATTS
FREQ. RESPONSE	70-20,000HZ
SENSITIVITY	91 DB
MYLAR TWEETER	30MM
MAGNET	15 OZ

CSL SERIES

## CSL-6904



### Injection Cone with Rubber Edge

SIZE	6x9" 4-WAY
POWER (R.M.P.D)	500 WATTS
POWER (R.M.S)	250 WATTS
FREQ. RESPONSE	35-21,000HZ
SENSITIVITY	93DB
MYLAR TWEETER	66MM
MAGNET	25 OZ



SPECIFICATIONS	CSL-1602A	CSL-1603	CSL-1603A
SIZE	6.5" 2-WAY	6" 3-WAY	6.5" 3-WAY
POWER (R.M.P.D)	250 WATTS	330 WATTS	330 WATTS
POWER (R.M.S)	125 WATTS	165 WATTS	165 WATTS
FREQUENCY RESPONSE	70-20,000HZ	70-20,000HZ	70-21,000HZ
SENSITIVITY	88 DB	91 DB	88 DB
MYLAR TWEETER	30MM	30MM	30MM
MAGNET	5 OZ	15 OZ	5 OZ



SPECIFICATIONS	CSL-4102	CSL-6903
SIZE	4x10" 2-WAY	6x9" 3-WAY
POWER (R.M.P.D)	200 WATTS	400 WATTS
POWER (R.M.S)	100 WATTS	200 WATTS
FREQUENCY RESPONSE	40-20,000HZ	35-21,000HZ
SENSITIVITY	88DB	93 DB
MYLAR TWEETER	30MM	66MM
MAGNET	6 OZ	25 OZ



## CSL-4602

COAXIAL CAR SPEAKERS



2 WAY



Injection Cone with Rubber Edge

SIZE	4x6" 2-WAY
POWER (R.M.P.D)	150 WATTS
POWER (R.M.S)	75 WATTS
FREQ. RESPONSE	70-20,000HZ
SENSITIVITY	91 DB
MYLAR TWEETER	30MM
MAGNET	6 OZ

SOLD BY PAIRS

## CSL-1302

CSL SERIES



2 WAY



Injection Cone with Rubber Edge

SIZE	3.5" 2-WAY
POWER (R.M.P.D)	90 WATTS
POWER (R.M.S)	45 WATTS
FREQ. RESPONSE	100-20,000HZ
SENSITIVITY	85DB
MYLAR TWEETER	30MM
MAGNET	8 OZ

SOLD BY PAIRS



3 WAY

### SPECIFICATIONS CSL-5703

SIZE	5x7" 3-WAY
POWER (R.M.P.D)	250 WATTS
POWER (R.M.S)	125 WATTS
FREQUENCY RESPONSE	70-21,000HZ
SENSITIVITY	91 DB
MYLAR TWEETER	30MM
MAGNET	10 OZ



3 WAY

### SPECIFICATIONS CSL-6803

SIZE	6x8" 3-WAY
POWER (R.M.P.D)	400 WATTS
POWER (R.M.S)	200 WATTS
FREQUENCY RESPONSE	50-21,000HZ
SENSITIVITY	91DB
MYLAR TWEETER	62MM (2.44")
MAGNET	10 OZ



2 WAY

### SPECIFICATIONS CSL-1402

SIZE	4" 2-WAY
POWER (R.M.P.D)	100 WATTS
POWER (R.M.S)	50 WATTS
FREQUENCY RESPONSE	80-18,000HZ
SENSITIVITY	88 DB
MYLAR TWEETER	30MM
MAGNET	6 OZ



2 WAY

### SPECIFICATIONS CSL-1502

SIZE	5.25" 2-WAY
POWER (R.M.P.D)	200 WATTS
POWER (R.M.S)	100 WATTS
FREQUENCY RESPONSE	75-18,000HZ
SENSITIVITY	88 DB
MYLAR TWEETER	30MM
MAGNET	8 OZ

# LOUDSPEAKERS

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## APAW-65CFF

LOW MID FREQUENCY



water  
REPELLENT

CARBON  
FIBER  
ZONE

250 Watts Speaker Size: 6.5"

### SPECIFICATIONS

POWER (R.M.S)	125 WATTS
FREQ. RESPONSE	75-10000HZ
SENSITIVITY	90dB
VOICE COIL	1.5" TIL
MOUNTING DEPTH	49MM (1-15/16")
IMPEDANCE	4 OHMS
MAGNET	18 Oz



Grills INCLUDED  
BLACK & WHITE.

Carbon Series



SPECIFICATIONS	APAW-620CF	APAW-80CFF	APAW-838CF
WOOFER SIZE	6"	8"	8"
POWER (R.M.S)	250 WATTS	300 WATTS	500 WATTS
POWER (R.M.S)	250 WATTS	150 WATTS	250 WATTS
FREQ. RESPONSE	50-10000HZ	70-9000HZ	45-10000HZ
SENSITIVITY	90dB	92dB	92dB
VOICE COIL	1.5" TIL	1.5" TIL	1.5" TIL
MOUNTING DEPTH	74MM (3")	58MM (2-5/16")	93MM (3-11/16")
IMPEDANCE	4 OHMS	4 OHMS	4 OHMS
MAGNET	21 OZ	34 OZ	38 OZ

# LOUDSPEAKERS

## AOCT-850

LOW MID FREQUENCY



# OCTAGON

LOW MID FREQUENCY LOUDSPEAKERS



SPEAKER SIZE	8"
POWER (P.M.P.O.)	500 WATTS
POWER (R.M.S)	250 WATTS
FREQ. RESPONSE	70-10000HZ
SENSITIVITY	93dB
VOICE COIL	2" TIL
MOUNTING DEPTH	DIS-CAST ALUMINUM
BASKET	85MM (3-11/32")
IMPEDANCE	8 OHMS
MAGNET	50 OZ



# LOUDSPEAKERS

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## APMG-G8-SL8

APMB-G SERIES 8 OHMS



**300 Watts**      **Speaker Size: 8"**

### SPECIFICATIONS

POWER (R.M.S)	150 WATTS
FREQ. RESPONSE	50-10000HZ
SENSITIVITY	91dB
VOICE COIL	1.5" KSV VOICE COIL
MOUNTING DEPTH	91MM (3-5/8")
IMPEDANCE	8 OHMS
MAGNET	30 OZ

# LOUDSPEAKERS

## APMB-G8-CP4

APMB-G SERIES 4 OHMS



**500 Watts**      **Speaker Size: 8"**

### SPECIFICATIONS

POWER (R.M.S)	250 WATTS
FREQ. RESPONSE	65-6000HZ
SENSITIVITY	95dB
VOICE COIL	2" KSV VOICE COIL
MOUNTING DEPTH	93MM (3-3/4")
IMPEDANCE	4 OHMS
MAGNET	35 OZ



SPECIFICATIONS	APMG-G6-CP8	APMG-G8-CP8	APMG-G6-SL8
WOOFER SIZE	6"	8"	6"
POWER (R.M.P.D)	250 WATTS	500 WATTS	200 WATTS
POWER (R.M.S)	125 WATTS	250 WATTS	100 WATTS
FREQUENCY RESPONSE	100-8000HZ	65-6000HZ	70-14000HZ
SENSITIVITY	95dB	92dB	92dB
VOICE COIL	1.5" KSV VOICE COIL	2" KSV VOICE COIL	1.5" KSV VOICE COIL
MOUNTING DEPTH	78MM (3-1/8")	93MM (3-3/4")	76MM (3")
IMPEDANCE	8 OHMS	8 OHMS	8 OHMS
MAGNET	30 OZ	35 OZ	25 OZ



SPECIFICATIONS	APMG-G6-CP4	APMG-G6-SL4	APMG-G8-SL4
WOOFER SIZE	6"	6"	8"
POWER (R.M.P.D)	250 WATTS	200 WATTS	300 WATTS
POWER (R.M.S)	125 WATTS	100 WATTS	150 WATTS
FREQUENCY RESPONSE	100-8000HZ	70-14000HZ	50-10000HZ
SENSITIVITY	95dB	92dB	91dB
VOICE COIL	1.5" KSV VOICE COIL	1.5" KSV VOICE COIL	1.5" KSV VOICE COIL
MOUNTING DEPTH	78MM (3-1/8")	78MM (3")	91MM (3-5/8")
IMPEDANCE	4 OHMS	4 OHMS	4 OHMS
MAGNET	30 OZ	25 OZ	30 OZ

# LOUDSPEAKERS

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## APMB-1611DL

APMB SERIES



**SLIM**  
LOUDSPEAKERS

SOLD  
by  
PAIRS



Mylar Crossover  
Capacitor Included



# LOUDSPEAKERS

APMB SERIES

## APMB-65FLT



**FLAT LOUDSPEAKERS**

**FLAT**  
HOUSING DESIGN



SOLD  
by  
PAIRS

APMB-6911DL  
DUAL CONE LOW MID  
FREQUENCY LOUDSPEAKER

Electrolytic Crossover  
Capacitor Included



SPECIFICATIONS	APMB-1611DL	SPECIFICATIONS	APMB-6911DL
WOOFER SIZE	6.5"	WOOFER SIZE	6x9"
POWER (R.M.P.D)	120 WATTS	POWER (R.M.P.D)	250 WATTS
POWER (R.M.S)	60 WATTS	POWER (R.M.S)	125 WATTS
FREQUENCY RESPONSE	60-17000HZ	FREQUENCY RESPONSE	60-20000HZ
SENSITIVITY	88dB	SENSITIVITY	92dB
VOICE COIL	1" NSV	VOICE COIL	1.5" TIL
MOUNTING DEPTH	43MM (1.7")	MOUNTING DEPTH	81MM (3.3/1.6")
IMPEDANCE	8 OHMS	IMPEDANCE	8 OHMS
MAGNET	6 OZ	MAGNET	8 OZ



SPECIFICATIONS	APMB-65FLT	SPECIFICATIONS	APMB-8FLT
WOOFER SIZE	6.5"	WOOFER SIZE	8"
POWER (R.M.P.D)	250 WATTS	POWER (R.M.P.D)	300 WATTS
POWER (R.M.S)	125 WATTS	POWER (R.M.S)	150 WATTS
FREQUENCY RESPONSE	80-9000HZ	FREQUENCY RESPONSE	70-80000HZ
SENSITIVITY	94dB	SENSITIVITY	93dB
VOICE COIL	1.5" TIL	VOICE COIL	1.5" TIL
MOUNTING DEPTH	49MM (1.93")	MOUNTING DEPTH	58MM (2.3")
IMPEDANCE	8 OHMS	IMPEDANCE	8 OHMS
MAGNET	18 OZ	MAGNET	34 OZ



# LOUDSPEAKERS

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## APMB-638SB-C

LOW MID FREQUENCY



**300 Watts** Speaker Size: 6"

### SPECIFICATIONS

POWER (R.M.S)	150 WATTS
FREQ. RESPONSE	500-5400HZ
SENSITIVITY	98dB
VOICE COIL	1.5" KSV
MOUNTING DEPTH	68MM (2-3/4")
IMPEDANCE	8 OHMS
MAGNET	38 Oz

# LOUDSPEAKERS

APMB SERIES

## APMB-6-C



**250 Watts** Speaker Size: 6"

### SPECIFICATIONS

POWER (R.M.S)	125 WATTS
FREQ. RESPONSE	100-8000HZ
SENSITIVITY	95dB
VOICE COIL	1.5" TIL DIE-CAST ALUMINUM
MOUNTING DEPTH	78MM (3-1/8")
IMPEDANCE	8 OHMS
MAGNET	30 Oz



**250 Watts** Speaker Size: 6"

### SPECIFICATIONS

POWER (R.M.S)	125 WATTS
FREQ. RESPONSE	350-5000HZ
SENSITIVITY	99dB
VOICE COIL	1.5" KSV STEEL BASKET
MOUNTING DEPTH	60MM (2-3/8")
IMPEDANCE	8 OHMS
MAGNET	20 Oz



**SPECIFICATIONS** APMB-6DC-C

WOOFER SIZE	6"
POWER (R.M.P)	250 WATTS
POWER (R.M.S)	125 WATTS
FREQUENCY RESPONSE	100-8000HZ
SENSITIVITY	95DB
VOICE COIL	1.5" TIL
	DIE-CAST ALUMINUM BASKET
MOUNTING DEPTH	78MM (3-1/8")
IMPEDANCE	8 OHMS
MAGNET	30 Oz



**SPECIFICATIONS** APMB-6ND-C

WOOFER SIZE	6"
POWER (R.M.P)	250 WATTS
POWER (R.M.S)	125 WATTS
FREQUENCY RESPONSE	100-8000HZ
SENSITIVITY	96DB
VOICE COIL	1.5" TIL
	DIE-CAST ALUMINUM BASKET
MOUNTING DEPTH	63MM (2.48")
IMPEDANCE	8 OHMS
MAGNET	8.5 Oz NEODYMIUM

# LOUDSPEAKERS

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## APSLM-10G

APSL SERIES



450 Watts Speaker Size: 10"

### SPECIFICATIONS

POWER (R.M.S) 225 WATTS  
 FREQ. RESPONSE 50-4000HZ  
 SENSITIVITY 97dB  
 VOICE COIL 2" HIGH TEMPERATURE CCAR  
 MOUNTING DEPTH 82MM (3-3/4")  
 IMPEDANCE 4 OHMS  
 MAGNET 50 Oz

# LOUDSPEAKERS

APMB SERIES

## APMB-8SND-C



500 Watts Speaker Size: 8"

### SPECIFICATIONS

POWER (R.M.S) 250 WATTS  
 FREQ. RESPONSE 66-6000HZ  
 SENSITIVITY 95dB  
 VOICE COIL 2" TIL  
 MOUNTING DEPTH 85MM (3-11/32")  
 IMPEDANCE 8 OHMS  
 MAGNET 5.5 Oz



New Products  
2016

SPECIFICATIONS	APSL-6-C	APSL-8-C	APSL-10-C	APSL-12-C
----------------	----------	----------	-----------	-----------

WOOFER SIZE	6"	8"	10"	12"
POWER (R.M.S)	200 WATTS	400 WATTS	700 WATTS	800 WATTS
POWER (R.M.S)	100 WATTS	200 WATTS	350 WATTS	400 WATTS
FREQ. RESPONSE	70-9000HZ	60-8000HZ	60-4000HZ	35-6000HZ
SENSITIVITY	91dB	95dB	96dB	94dB
VOICE COIL	1.5"	2"	2.5"	2.5"
BASKET	RIGID STEEL	RIGID STEEL	RIGID STEEL	KAPTON
MOUNTING DEPTH	78MM (3-1/16")	95MM (3-3/4")	102MM (4")	130MM (5-1/10")
IMPEDANCE	8 OHMS	8 OHMS	8 OHMS	8 OHMS
MAGNET	22 Oz	34 Oz	56 Oz	53 Oz



SPECIFICATIONS	APMB-4SND-C	APMB-5.14SND-C	APMB-6SND-C
----------------	-------------	----------------	-------------

WOOFER SIZE	4"	5-1/4"	6"
POWER (R.M.S)	100 WATTS	100 WATTS	200 WATTS
POWER (R.M.S)	50 WATTS	50 WATTS	100 WATTS
FREQUENCY RESPONSE	120-13000HZ	100-13000HZ	100-8000HZ
SENSITIVITY	94dB	93dB	96dB
VOICE COIL	1" TIL	1" TIL	1.5" TIL
MOUNTING DEPTH	46MM (1-3/4")	48MM (2")	63MM (2-1/2")
IMPEDANCE	8 OHMS	8 OHMS	8 OHMS
MAGNET	1.3 Oz	1.3 Oz	3.1 Oz



## APMB-838SB-C

LOW MID FREQUENCY



300 Watts Speaker Size: 8"

### SPECIFICATIONS

POWER (R.M.S) 150 WATTS  
 FREQ. RESPONSE 350-5000HZ  
 SENSITIVITY 99dB  
 VOICE COIL 1.5" KSV  
 MOUNTING DEPTH 76MM (3")  
 IMPEDANCE 8 OHMS  
 MAGNET 38 Oz

APMB SERIES

## APMB-6910T



300 Watts Speaker Size: 6x9"

### SPECIFICATIONS

POWER (R.M.S) 150 WATTS  
 FREQ. RESPONSE 70-22000HZ  
 SENSITIVITY 94dB  
 VOICE COIL 1.5" TIL  
 MOUNTING DEPTH 88MM (3-1/2")  
 IMPEDANCE 8 OHMS  
 MAGNET 30 Oz



### SPECIFICATIONS

	APMB-B-C	APMB-8BT-C	APMB-8SB-C
WOOFER SIZE	8"	8"	8"
POWER (R.M.S)	500 WATTS	500 WATTS	250 WATTS
POWER (R.M.S)	250 WATTS	250 WATTS	125 WATTS
FREQ. RESPONSE	65-6000HZ	65-6000HZ	350-5000HZ
SENSITIVITY	95dB	95dB	99dB
VOICE COIL	2" TIL	2" TIL	1.5" KSV
BASKET	DIE-CAST ALUMINUM	DIE-CAST ALUMINUM	STEEL
MOUNTING DEPTH	93MM (3-3/4")	93MM (3-3/4")	70MM (2-7/8")
IMPEDANCE	8 OHMS	8 OHMS	8 OHMS
MAGNET	35 Oz	35 Oz	20 Oz



### SPECIFICATIONS

	APMB-6800-C	APMB-6900-C
WOOFER SIZE	6x8"	6x9"
POWER (R.M.S)	250 WATTS	250 WATTS
POWER (R.M.S)	125 WATTS	125 WATTS
FREQUENCY RESPONSE	80-7500HZ	70-10000HZ
SENSITIVITY	93dB	94dB
VOICE COIL	1.5" TIL	1.5" TIL
MOUNTING DEPTH	67MM (2-5/8")	88MM (3-1/2")
IMPEDANCE	8 OHMS	8 OHMS
MAGNET	20 Oz	30 Oz

# PABS *Crew*

10 years ago, PABS was founded by Pichi with the purpose of giving the youth a new way to express themselves through art in clothes and to view the free expression.

Not only to our clients were inspired to try this style, but different artist had make expand our horizons. This is how we walked in the world in which we find ourselves dedicated to customize in different surfaces. Thanks to our mini reality we give voice to our different styles of art. Whether in cars, graphic design, tattoos, etc.

PABS crew existed for the sole purpose for the client but I think that we have evolved to help give a voice to the artist. Therefore it is also when Audiopipe took the decision to unite both worlds.

**Pabs crew said:** What better way to open up your eyes to herds of people?

There are people in both environments which are alien to different qualities of each world. We hope that after this union we can lay to one side the divisions that exist currently.

We are a family team! We have the goal to be inspiration for different artists as X and Y have inspired us.

It is great feeling when children comes and take a photo. We do art because it is a profession we do art because it is a lifestyle.



CREATIONS





## APCD-78FR

COMPRESSION DRIVERS

WORK WITH APH-4545-H & APH-5757



**400 Watts** Ferrite Magnet

**SPECIFICATIONS**

POWER (R.M.S) 200 WATTS  
 FREQ. RESPONSE 1000 - 20000HZ  
 SENSITIVITY 107dB  
 DRIVERS TITANIUM DIAPHRAGM  
 VOICE COIL 2.75" KAPTON  
 MAGNET DIMENSION 156MM X 20MM

**Titanium  
COMPRESSION DRIVER**

WORK WITH APH-4545-H & APH-5757



THROAT  
1.375"

THROAT  
1.375"

**SPECIFICATIONS**

	APCD-44FR	APCD-50FR
POWER (R.M.S)	80 WATTS	100 WATTS
POWER (R.M.S)	40 WATTS	50 WATTS
FREQUENCY RESPONSE	1,000 - 20,000HZ	1,500 - 20,000HZ
SENSITIVITY	104 dB	105 dB
DRIVER	TITANIUM DIAPHRAGM	TITANIUM DIAPHRAGM
VOICE COIL	1.75" KAPTON	2" KAPTON
MAGNET DIMENSION	113MM X 15MM FERRITE MAGNET	134MM X 17MM FERRITE MAGNET

**APCDAD-44FR**  
REPLACEMENT VOICE COIL  
FOR APCD-44FR



**APCDAD-50FR**  
REPLACEMENT VOICE COIL  
FOR APCD-50FR



**APCDAD-78FR**  
REPLACEMENT VOICE COIL  
FOR APCD-78FR



HIGH FREQUENCY HORNS/ ADAPTERS

## APH Series



THROAT  
1.375"



THROAT  
1.375"



THROAT  
1.4"



APH-4545-H

APH-5757

APHL-8634

- HIGH FREQUENCY HORN
- PLASTIC HORN
- THROAT SIZE: 1.375"
- OVERALL DIMENSIONS: 4.5"(H) X 4.5"(W) X 2.5"(D)

- HIGH FREQUENCY HORN
- PLASTIC HORN
- THROAT SIZE: 1.375"
- OVERALL DIMENSIONS: 5.5"(H) X 6.2"(W) X 4.3"(D)

- 1.4" LINE ARRAY SYSTEM HORN
- PLASTIC COVERED STEEL
- THROAT DIAMETER: 1.4"
- MOUNTING DIAMETER: 101MM & 75MM



THROAT  
2"



THROAT  
2"



THROAT  
2"

APH-552580-H

- ALUMINUM HORN
- THROAT SIZE: 2"
- OVERALL DIMENSIONS: 3"(H) X 5"(W) X 5"(D)
- DEPTH: 2.5"

APH-625080-H

- SIZE: 157\*157MM(6.2\*6.2")
- DEPTH: 130MM
- CENTER SCREW HOLE TO CENTER SCREW HOLE: 160MM

APH-775080-H

- SIZE: 196\*196MM(7.7\*7.7")
- DEPTH: 125MM
- CENTER SCREW HOLE TO CENTER SCREW HOLE: 195MM

APCDAD-775

- HORN ADAPTER
- OUTER DIAMETER: Ø 150 MM
- HEIGHT: 20 MM
- THREAD: 1.3/8"

APCDAD-2550

- HORN ADAPTER
- OUTER DIAMETER: Ø 126 MM
- HEIGHT: 20 MM
- THREAD: 1.3/8"

## APH-4040

APH LINE OF SCREW-ON HORNS

### 4.5" TITANIUM DRIVER

- SIZE:  $\Phi 116 \times H57.5MM$
- MAX POWER: 120 WATTS
- R.M.S. POWER: 60 WATTS
- IMPEDANCE:  $8\Omega \pm 15\%$  (AT 100HZ)
- SOUND PRESSURE LEVEL: 103DB  $\pm 2dB$  (AT 1M 1W)
- FREQUENCY RESPONSE: 1000-20KHZ
- TOTAL WEIGHT: 1.74KG
- VOICE COIL: 1.75" KYV, DCR 6.4 $\Omega \pm 5\%$
- MAGNET:  $\Phi 116 \times \Phi 45 \times \Phi 15MM$  (Y30)
- PLATE & T YOKE: 7/7MM

COMPATIBLE WITH APH-8632, APH-52580-H, APH-82580-H & APH-775080-H



## ATV-4040

- 1.75" TITANIUM SUPER DIAPHRAGM
- 1.75" HIGH TEMPER KAPTON VOICE COIL

## APH-4545-CD

- MAX POWER: 70W
- 3.5" TITANIUM DRIVER
- FREQUENCY RANGE: 1K-20KHZ
- SOUND PRESSURE: 110dB  $\pm 2dB$
- VOICE COIL: 1.3" KSV VOICE COIL
- IMPEDANCE: 8 OHMS
- MAGNET: 120Z

COMPATIBLE WITH APH-4545-H & APH-8797



## ATV-4545

- 2" TITANIUM SUPER DIAPHRAGM
- 1.3" HIGH TEMPERATURE KAPTON VOICE COIL
- ONE DIAPHRAGM



## NTX-4000USA

- MAX POWER: 500W
- 2" KAPTON VOICE COIL
- HIGH-GRADE TITANIUM DIAPHRAGM
- FREQ. RESPONSE: 1KHZ - 20KHZ
- SPL: 100DB
- FS: 1KHZ



COMPATIBLE WITH APH-4545-H & APH-8797



### NSDV-4000USA

#### TITANIUM DIAPHRAGM

- IMPEDANCE: 8 OHMS
- 500W MAX.
- TITANIUM COMPRESSION DRIVER
- KAPTON VOICE COIL WITH FLAT WIRE
- TITANIUM DIAPHRAGM
- STRONTIUM MAGNET



SPECIFICATIONS	APFD-320T-ND	APFD-360T	APCD-40B5	ADR-250
OUTPUT POWER (PMPO)	220 WATTS	220 WATTS	1800 WATTS	150 WATTS
OUTPUT POWER (RMS)	110 WATTS	110 WATTS	900 WATTS	75 WATTS
FREQUENCY RESPONSE	500-18KHZ	500-18KHZ	300-7KHZ	400-8KHZ
SPL	108dB	108dB	110dB	107dB
DRIVER	TITANIUM DIAPHRAGM	TITANIUM DIAPHRAGM	RESIN DIAPHRAGM	RESIN DIAPHRAGM
VOICE COIL	3 7/8" EXIT	3 7/8" EXIT	4" KAPTON	2" KAPTON
MAGNET DIMENSION	$\Phi 124 \times 8MM$ ND	$\Phi 170 \times 20$ FERRITE	$\Phi 200 \times 20$ FERRITE	$\Phi 105 \times 12$ FERRITE
IMPEDANCE	8 OHM	8 OHM	8 OHM	8 OHM

BOLT-ON IS COMPATIBLE WITH APH-8632, APH-52580-H, APH-82580-H & APH-775080-H  
SCREW-ON IS COMPATIBLE WITH APH-4545-H & APH-8797




# TWEETERS

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## ATX-115

ATX SERIES



### Aluminium Tweeter

SPECIFICATIONS	
OUTPUT POWER (PMPD)	600 WATTS
OUTPUT POWER (RMS)	300 WATTS
MAGNET STRUCTURE	1.9 OZ
IMPEDANCE	8 OHM
INPUT SENSITIVITY	105dB
FREQUENCY RESPONSE	2K-25KHZ



ATX-3B



ATX-100B

SPECIFICATIONS	ATX-3B	ATX-100	ATX-100B (BLACK)
OUTPUT POWER (PMPD)	100 WATTS	200 WATTS	200 WATTS
OUTPUT POWER (RMS)	50 WATTS	100 WATTS	100 WATTS
MAGNET STRUCTURE	25x7MM NOFEB	25x7MM NOFEB	25x7MM NOFEB
IMPEDANCE	4 OHM	4 OHM	4 OHM
INPUT SENSITIVITY	100dB	100dB	100dB
FREQUENCY RESPONSE	2K-20KHZ	2K-20KHZ	2K-20KHZ

# TWEETERS

## ATR SERIES

### ATR-3233B

- 350 WATTS (PMPD)
- MAGNET: 8 OZ
- IMPEDANCE: 4OHM
- INPUT SENSITIVITY: 104dB
- FREQ. RESPONSE: 2K-20KHZ

### ATR-3233C

- 350 WATTS (PMPD)
- MAGNET: 8 OZ
- IMPEDANCE: 4OHM
- INPUT SENSITIVITY: 104dB
- FREQ. RESPONSE: 2K-20KHZ

### ATR-4063B

- 600 WATTS (PMPD)
- MAGNET: 12 OZ
- IMPEDANCE: 4OHM
- INPUT SENSITIVITY: 105dB
- FREQ. RESPONSE: 2K-25KHZ



### ATR-4063C

- 600 WATTS (PMPD)
- MAGNET: 12 OZ
- IMPEDANCE: 4OHM
- INPUT SENSITIVITY: 105dB
- FREQ. RESPONSE: 2K-25KHZ

### ATR-3723B

- 350 WATTS (PMPD)
- MAGNET: 6 OZ
- IMPEDANCE: 4OHM
- INPUT SENSITIVITY: 99dB
- FREQ. RESPONSE: 2K-25KHZ

### ATR-3723C

- 350 WATTS (PMPD)
- MAGNET: 6 OZ
- IMPEDANCE: 4OHM
- INPUT SENSITIVITY: 99dB
- FREQ. RESPONSE: 2K-25KHZ



# TWEETERS

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## ATR-4053

ALUMINUM TWEETER DIAMOND CHROME CUTTING FINISH



- ALUMINUM TWEETER DIAMOND CHROME CUTTING FINISH
- 1.5" HIGH TEMPERATURE KAPTON VOICE COIL
- 1.3 OZ MAGNET STRUCTURE
- 400 WATTS PEAK POWER
- 4-8 OHMS IMPEDANCE
- FERRO FLUID ENHANCED VOICE COIL
- SENSITIVITY: 107 DB
- FREQUENCY RESPONSE: 3000-22KHZ
- CROSSOVER CAPASITOR INCLUDED

# TWEETERS

ATR SERIES

## ATR-3721



SOLD by PAIRS



350 Watts

Titanium Super Bullet

SPECIFICATIONS  
OUTPUT POWER (RMS)  
MAGNET STRUCTURE  
IMPEDANCE  
INPUT SENSITIVITY  
FREQUENCY RESPONSE

175 WATTS  
1000 - 20000HZ  
6 OZ  
4 OHM  
99dB  
2K-25KHZ

### SPECIFICATIONS ATR-6651

POWER (P.M.P.O) 800 WATTS  
POWER (R.M.S) 400 WATTS  
MAGNET STRUCTURE 50 OZ  
IMPEDANCE 4 OHM  
INPUT SENSITIVITY 105dB  
FREQ. RESPONSE 2K-25KHZ

- 4" TITANIUM SUPER TWEETER • DIE CAST ALUMINUM FRAME • DIAMOND CHROME CUTTING FINISH • 2.8" HIGH TEMPERATURE KAPTON VOICE COIL
- FERRO FLUID ENHANCED VOICE COIL • MYLAR CROSSOVER PACK IN GIFT BOX • SINGLE PACK IN GIFT BOX.



### ATV-4053

REPLACEMENT VOICE COIL FOR ATR-4053



### ATV-6651

REPLACEMENT KAPTON VOICE COIL FOR ATR-6651

- 2.8" TITANIUM SUPER DIAPHRAGM
- 2.8" HIGH TEMPERATURE KAPTON VOICE COIL
- ONE DIAPHRAGM



### SPECIFICATIONS ATR-3231 ATR-4061 ATR-4421

	ATR-3231	ATR-4061	ATR-4421
OUTPUT POWER (PMPD)	350 WATTS	600 WATTS	700 WATTS
OUTPUT POWER (RMS)	175 WATTS	300 WATTS	350 WATTS
MAGNET STRUCTURE	8 OZ	12 OZ	18 OZ
IMPEDANCE	4 OHM	4 OHM	4 OHM
INPUT SENSITIVITY	104dB	105dB	105dB
FREQUENCY RESPONSE	2K-20KHZ	2K-25KHZ	2K-25KHZ



ATR-3231



ATR-4061



ATR-4421

### ATR-3231

REPLACEMENT VOICE COIL FOR ATR-3231



### ATR-3721

REPLACEMENT VOICE COIL FOR ATR-3721



### ATR-4061

REPLACEMENT VOICE COIL FOR ATR-4061



### ATR-4421

REPLACEMENT VOICE COIL FOR ATR-4421





# TWEETERS

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## ATQ-50HF

ATQ SERIES



WORK WITH APH-4545-H & APH-5757

### 200W Zinc Alloy Tweeter

- 200 Watts Power (P.M.P.O.)
- 100 Watts Power (R.M.S.)
- Frequency Response: 2K-22KHz
- 1" High Temperature Kapton Voice Coil
- Sensitivity: 102 dB
- 8 Oz Magnet Structure
- Impedance: 8 Ohms
- Ferro Fluid Enhanced Voice Coil

# TWEETERS

## ATQ-1015

ATQ SERIES



Mylar Crossover Capacitor Included



### 250 Watts Titanium Bullet Tweeter

#### SPECIFICATIONS

OUTPUT POWER (RMS)	125 WATTS
MAGNET STRUCTURE	25XBMM NdFeB
IMPEDANCE	4 OHM
INPUT SENSITIVITY	105DB
FREQUENCY RESPONSE	2K-20KHZ

## ATQ-3725

OUTPUT POWER (PMPO)	350 WATTS
OUTPUT POWER (RMS)	175 WATTS
MAGNET STRUCTURE	10 OZ
IMPEDANCE	8 OHM
INPUT SENSITIVITY	99DB
FREQUENCY RESPONSE	2K-25KHZ



#### SPECIFICATIONS

	ATQ-1250T	ATQ-1550
OUTPUT POWER (PMPO)	250 WATTS	300 WATTS
OUTPUT POWER (RMS)	125 WATTS	100 WATTS
MAGNET STRUCTURE	24.5XBMM NdFeB	25XBMM NdFeB
IMPEDANCE	8 OHM	4 OHM
INPUT SENSITIVITY	105DB	105DB
FREQUENCY RESPONSE	2K-20KHZ	2K-20KHZ

#### ATQVC-1015

- REPLACEMENT VOICE COIL FOR ATQ-1550  
 • 1" HIGH TEMPERATURE KAPTON VOICE COIL



#### ATQVC-1250T

- REPLACEMENT VOICE COIL FOR ATQ-1250T  
 • 1" HIGH TEMPERATURE KAPTON VOICE COIL



#### ATQVC-1550

- REPLACEMENT VOICE COIL FOR ATQ-1550  
 • 1" HIGH TEMPERATURE KAPTON VOICE COIL



# TWEETERS

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## APHE-T100



## APHE-T300



Super High Frequency Tweeter




SUPER HIGH FREQUENCY MINI TWEETERS

## NTC-2727



275 Watts



Slim Mount

MODEL	APHE-T100	APHE-S200	APHE-T300
OUTPUT POWER (PMPO)	100 WATTS	300 WATTS	80 WATTS
OUTPUT POWER (RMS)	50 WATTS	150 WATTS	40 WATTS
IMPEDANCE	4 OHMS	4 OHMS	4 OHMS
INPUT SENSITIVITY	92dB	92dB	93dB
FREQUENCY RESPONSE	2.5KHZ-25KHZ	4.5KHZ-30KHZ	3KHZ-30KHZ

MODEL	NTC-1525	NTC-2727
OUTPUT POWER (PMPO)	300 WATTS	275 WATTS
OUTPUT POWER (RMS)	150 WATTS	50 WATTS
IMPEDANCE	4 1/2 OHM	4 OHM
INPUT SENSITIVITY	92dB	92dB
FREQUENCY RESPONSE	4.5KHZ-30KHZ	2.5KHZ-20KHZ



APHE-S200



NTC-1525



SURFACE MOUNT



## MR. CHEN ELECTRONICS

# CHINA

### WHEN DID YOU FIRST HEAR ABOUT AUDIOPIPE?

I heard about Audiopipe in 2009.

### WHY DID YOU CHOOSE AUDIOPIPE?

I choose Audiopipe because of the Candy Red APX subwoofer as well as its outstanding Amps.

### HOW LONG HAVE YOU BEEN WORKING WITH AUDIOPIPE?

Since 2012, I started to sell Audiopipe Products. Audiopipe runs for the fourth Year in the capital city of China.

### WHICH AUDIOPIPE PRODUCTS HAVE YOU THE HIGHEST DEMAND?

TXX-APX Candy Red and Candy Blue subwoofers have always been in greatest demand among our customer base.

### WHAT KIND OF FEEDBACK DO YOU GET FROM YOUR CUSTOMERS IN REGARDS TO THE BRAND?

Excellent Products, High-quality Performance" is what we get from our buyers.



## International Dealers

### WHO IS YOUR TARGET CUSTOMER?... AGE RANGE?...AND WHAT KIND OF APPLICATIONS IS THE PRODUCT USED IN?

(personal, professional, competition)

Our target customers are ranging from 20-year-old youngsters to 40-year-old middle aged man. And mainly it is for competition. It is worthy of mentioning that Audiopipe subwoofer reached SPL 159.13 in AEEA competition.

### TELL US YOUR GENERAL EXPERIENCE WITH AUDIOPIPE?

Audiopipe brings us quality service. More importantly, brilliant Audiopipe R&D Team from home and abroad is main reason that I choose Audiopipe.

### AUDIOPIPE CITIES:

Hangzhou, Shanghai, Guangzhou, Chongqing, Beijing, Shenzhen, Dongguan.

# ENCLOSURES

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## APSB-10BDF

DOWN FIRING SUBWOOFER TECHNOLOGY

### 10" SHALLOW MOUNT SUBWOOFER

- 400WATTS POWER (P.M.P.O)
- 200WATTS POWER (R.M.S)
- SENSITIVITY: 90DB
- FREQUENCY RESPONSE: 50-1000 HZ
- IMPEDANCE: 4 OHMS
- MAGNET: 40 OZ
- DIMENSION (HXWXL):  
5.8"x12.6"x17.9"  
148x320x455MM

# 400 WATTS



DOWN FIRING

## APVB-12AMP

HIGH QUALITY MDF CONSTRUCTION

COVERED WITH DURABLE HIGH DENSITY CARPET

SINGLE 12" HIGH PERFORMANCE WOOFER

2" 4-LAYER KAPTON VOICE COIL

68 OZ STRONTIUM MAGNET

4 OHMS MONO

OUTPUT POWER (P.M.P.O.): 600WATTS

OUTPUT POWER (RMS): 300WATTS

IMPEDANCE: 4 OHM MONO

BOX DIMENSION(HXWXL):

17.1x17x13.4"

### AMPLIFIER:


HIGH AND LOW LEVEL INPUTS

REMOTE LEVEL CONTROL INCLUDED

VARIABLE LOW-PASS CROSSOVER



# 600 WATTS



# ENCLOSURES

CAR SUBWOOFER BOX

## APSQ SERIES

### APSQ-12ET

POWER P.M.P.O. 750 WATTS  
 POWER R.M.S. 375 WATTS  
 IMPEDANCE: 4 OHMS MONO  
 FREQ. RESPONSE: 28-400HZ  
 INPUT SENSITIVITY: 103DB  
 SUBWOOFER: 12" TS-AR 12  
 DIMENSION: 376x382x491MM  
 (HXWXL) 14.8"x15"x19.3"

## SINGLE

### APSQ-120ET

POWER P.M.P.O. 1500 WATTS  
 POWER R.M.S. 750 WATTS  
 IMPEDANCE: DUAL 2 OHMS  
 FREQ. RESPONSE: 28-400HZ  
 INPUT SENSITIVITY: 103DB  
 SUBWOOFER: 12" TS-VR 12  
 DIMENSION: 376x382x829MM  
 (HXWXL) 14.8"x15"x32.6"

## DOUBLE



# New Products 2016



# ENCLOSURES

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## APSB-12AMP

SINGLE PORTED BASS ENCLOSURE

REMOTE GAIN CONTROL



600 Watts 12"

- HIGH QUALITY MDF CONSTRUCTION
- COVERED WITH DURABLE HIGH DENSITY CARPET
- SINGLE 12" HIGH PERFORMANCE WOOFER
- 2" 4-LAYER BLACK ALUMINUM VOICE COIL
- 40 OZ STRONTIUM MAGNET
- 4 OHMS MONO
- HIGH AND LOW LEVEL INPUTS
- REMOTE LEVEL CONTROL INCLUDED
- VARIABLE LOW-PASS CROSSOVER
- DIMENSIONS: 24" X 15" X 7"

New Products  
2016

only 7" deep



# ENCLOSURES

## APSB Series

### APSB-10SLM

- 10" SHALLOW MOUNT SUBWOOFER
- 400 WATTS POWER (P.M.P.O.)
- 200 WATTS POWER (R.M.S.)
- MOUNTING DEPTH: 71MM
- FREQUENCY RESPONSE: 90 DB
- VC SIZE: 2"
- IMPEDANCE: 2X4 OHMS
- MAGNET: 40 OZ



extra SLIM  
FLAT WOOFER  
MDF CONSTRUCTION

### APSB-12SLM

- 12" SHALLOW MOUNT SUBWOOFER
- 500 WATTS POWER (P.M.P.O.)
- 250 WATTS POWER (R.M.S.)
- MOUNTING DEPTH: 73MM
- FREQUENCY RESPONSE: 91 DB
- VC SIZE: 2"
- IMPEDANCE: 2X4 OHMS
- MAGNET: 50 OZ

### SPECIFICATIONS VOZ-5000

- POWER (P.M.P.O.): 300 WATTS
- POWER (R.M.S.): 150 WATTS
- FREQ. RESPONSE: 100-20,000HZ
- SENSITIVITY: 93DB
- SPEAKER SIZE: 5-1/4"
- VOICE COIL: 5-1/4" LOW MID FREQ.
- LOUDSPEAKER
- MAGNET: 10 OZ



VOZ-5000

### APDH-1000

- BASSPIPE SUBWOOFER
- POWER (P.M.P.O.): 400 WATTS
- POWER (R.M.S.): 200 WATTS
- 80W RMS CLASS-AB AMPLIFIER (14.4V-DC)
- 40HM LOAD STABLE
- FREQUENCY RESPONSE: 25HZ-250HZ/FULL
- ADJUSTABLE INPUT GAIN, LPF.
- POWERFUL MOSFET PWM POWER SUPPLY.



APDH-1000  
BASSPIPE

ENCLOSURE  
IMPROVED TECHNOLOGY

### SPECIFICATIONS

- OUTPUT POWER (PMPD): 500 WATTS
- OUTPUT POWER (RMS): 250 WATTS
- IMPEDANCE: 4 OHMS MONO
- INPUT SENSITIVITY: 105DB
- FREQUENCY RESPONSE: 32-400HZ
- SUBWOOFER: 10" TS-AR10
- STRONTIUM MAGNET: 536X211X371MM
- DIMENSION (HXWXL): 21.1X8.3X14.6"

### APBP-1000ET

- 500 WATTS
- 250 WATTS
- 4 OHMS MONO
- 105DB
- 32-400HZ
- 10" TS-AR10
- 536X211X371MM
- 21.1X8.3X14.6"



SLIM  
ENCLOSURE  
IMPROVED TECHNOLOGY

APBP-1000ET

### APBP-1200ET

- 750 WATTS
- 375 WATTS
- 4 OHMS MONO
- 108DB
- 28-400HZ
- 12" TS-AR12
- 600X211X396MM
- 23.6X8.3X15.6"



SLIM  
ENCLOSURE  
IMPROVED TECHNOLOGY

APBP-1200ET

# ENCLOSURES

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## APSB-15ET

SEALED BASS ENCLOSURES

**SEALED**

**EXT**  
Edge Extension Technology

1000 Watts High Performance

### HIGH PERFORMANCE SEALED BASS ENCLOSURE

- HIGH QUALITY MDF CONSTRUCTION
- AIR TIGHT SEALED CHAMBER
- DURABLE DARK GRAY CARPET
- SINGLE 15" EDGE EXTENSION TECHNOLOGY PP CONE WOOFER
- 73 Oz STRONTIUM MAGNET
- 2.5" 4-LAYER SINGLE VOICE COIL BASV
- 4 OHM MONO

**ENCLOSURE**  
IMPROVED TECHNOLOGY



# ENCLOSURES

VENTE BASS ENCLOSURE

**SEALED**



**ENCLOSURE**  
IMPROVED TECHNOLOGY

- HIGH PERFORMANCE VENTED BASS ENCLOSURE
- TERMINALS FOR MULTIPLE WIRING APPLICATIONS
- CONSTRUCTED OF HIGH GRADE MDF
- DARK AUTOMATIC GRADE CARPET
- ONE PIECE PP CONE WOOFER
- EXT TECHNOLOGY

## APSB-120ET

**EXT**  
Edge Extension Technology

1500 Watts 12" Subwoofers

- HIGH PERFORMANCE SEALED BASS ENCLOSURE.
- HIGH FIDELITY ACOUSTIC MDF CONSTRUCTION.
- AIR TIGHT SEALED CHAMBER
- DURABLE DARK GRAY CARPET.
- DUAL 12" EDGE EXTENSION TECHNOLOGY PP CONE WOOFER.
- IMPEDANCE: DUAL 2 Ω
- FREQ. RESPONSE: 28-400HZ
- 328x430x696MM

SPECIFICATIONS	APSB-10ET	APVB-10ET	APSB-12ET	APVB-12ET
OUTPUT POWER (PMPQ)	500 WATTS	500 WATTS	750 WATTS	750 WATTS
OUTPUT POWER (RMS)	250 WATTS	250 WATTS	375 WATTS	375 WATTS
IMPEDANCE	4 OHMS MONO	4 OHMS MONO	4 OHMS MONO	4 OHMS MONO
INPUT SENSITIVITY	1010B	1010B	1030B	1030B
FREQUENCY RESPONSE	32-400HZ	32-400HZ	28-400HZ	28-400HZ
SUBWOOFER	10" TS-AR10	10" TS-AR10	12" TS-AR12	12" TS-AR12
DIMENSION (HXWXL)	335x391x278MM 13.2x15.4x10.9"	335x391x278MM 13.2x15.4x10.9"	350x430x328MM 13.8x16.9x12.9"	350x430x328MM 13.8x16.9x12.9"



APSB-10ET (10")  
APSB-12ET (12")

**SEALED**



APVB-10ET (10")  
APVB-12ET (12")

**VENTED**

SPECIFICATIONS	APVB-100BET
OUTPUT POWER (PMPQ)	1000 WATTS
OUTPUT POWER (RMS)	500 WATTS
IMPEDANCE	DUAL 2 Ω
INPUT SENSITIVITY	1020B
FREQUENCY RESPONSE	26-400HZ
SUBWOOFER	10" TS-VR10
DIMENSION (HXWXL)	278x391x658MM 10.9x15.4x25.9"



APSB-120ET (12")

**SEALED**

SPECIFICATIONS	APVB-120BET
OUTPUT POWER (PMPQ)	1500 WATTS
OUTPUT POWER (RMS)	750 WATTS
IMPEDANCE	DUAL 2 Ω
INPUT SENSITIVITY	1030B
FREQUENCY RESPONSE	28-400HZ
SUBWOOFER	12" TS-VR12
DIMENSION (HXWXL)	328x430x696MM 12.9x16.9x27.4"



APVB-100BET (10")  
APVB-120BET (12")

**VENTED**



## 600 WATTS

### APSE-120PC

#### HIGH PERFORMANCE SEALED ENCLOSURE

- FREQUENCY RESPONSE: 25-1000HZ
- CONSTRUCTED OF HIGH GRADE MDF
- 328MM(H)x15.4(D)x27.4MM(L)

### APCL-100Z

#### 2 CHANNEL POWER AMPLIFIER

- BUILT-IN VARIABLE HIGH PASS & LOW PASS CROSSOVER
- RCA LINE INPUT-OUTPUT JACKS
- ELECTRONIC PROTECTION CIRCUITRY TO PROTECT THE AMPLIFIER FROM SHORT CIRCUIT, DC OFFSET & THERMAL OVERLOAD.
- 55MM(H)x176MM(W)x224MM(L)
- 2.2"(H)x7.0"(W)x8.8"

### BMS-750

#### AMPLIFIER INSTALLATION KIT

- PRIMARY WIRE I: 17" 10 AWG RED
- PRIMARY WIRE II: 3" 10 AWG SILVER
- SPEAKER WIRE: 25" 16 AWG
- FUSE: 40AMP AGU
- FUSE HOLDER: N5-C
- LOOM TUBING: 3" SPLIT LOOM TUBING
- CABLE TIES: 10 ASSORTED

New Products  
**2016**



Car Subwoofer  
**Combo Package**



### APSB-1200X

#### HIGH PERFORMANCE SEALED ENCLOSURE

- FREQUENCY RESPONSE: 23-900HZ
- DUAL 2 OHMS IMPEDANCE
- CONSTRUCTED OF HIGH GRADE MDF
- 328MM (H) X 430MM (D) X 696MM (L)
- 12.9" (H) X 16.9" X (D) X 27.4" (L)

### APCL-200Z

#### 2 CHANNEL POWER AMPLIFIER

- BUILT-IN VARIABLE HIGH PASS & LOW PASS CROSSOVER
- RCA LINE INPUT/OUTPUT JACKS
- ELECTRONIC PROTECTION CIRCUITRY TO PROTECT THE AMPLIFIER FROM SHORT CIRCUIT, DC OFFSET & THERMAL OVERLOAD.
- REMOTE SUB-WOOFER VOLUME CONTROL
- 55MM (H) X 176MM (D) X 260MM (L)
- 2.2" (H) X 7" X (D) X 10.2" (L)

### PK-700X

#### AMPLIFIER INSTALLATION KIT

- 17 FT. 2 RCA PLUGS TO 2 RCA PLUGS WITH SIGNAL WIRE
- 17 FT. 10 AWG RED PRIMARY WIRE, 3 FT. 10 AWG BLACK PRIMARY WIRE
- 30 AMP ATC FUSE, 10 AWG FUSE HOLDER
- GOLD RING TERMINAL RED COLOR, GOLD RING TERMINAL BLACK COLOR
- GOLD PLATE SPADE TERMINAL BLACK COLOR, GOLD PLATED SPADE TERMINAL RED COLOR
- BUT SPLICES 2PCS, 10 ASSORTED CABLE TIES, 3 FT. SPLIT LOOM TUBING



# ComboPACKAGE

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## AP-PP1000

CAR SUBWOOFER COMBO



# 1000Watts

PAIR OF 12" SUBWOOFERS  
2 CHANNEL POWER AMPLIFIER

### TS-PP2-12-D4

- 1000 WATTS POWER (R.M.P.O.)
- 300 WATTS POWER (R.M.S.)
- FREQUENCY RESPONSE: 29-1500HZ
- SENSITIVITY: 86DB
- 2" 4-LAYER KAPTON VOICE COIL RIGID STEEL FRAME
- PP CONE WITH RUBBER SURROUND
- MOUNTING DEPTH: 142MM (5-5/8")
- IMPEDANCE: DUAL 4 OHMS
- 68 Oz MAGNET



## Car Subwoofer Combo Package

### APCL-2002


- BUILT-IN VARIABLE HIGH BASS & LOW PASS CROSSOVER
- RCA LINE INPUT/OUTPUT JACKS
- ELECTRONIC PROTECTION CIRCUITRY TO PROTECT THE AMPLIFIER FROM SHORT CIRCUIT, DC OFFSET & THERMAL OVERLOAD.
- REMOTE SUBWOOFER VOLUME CONTROL
- 55MM(H) x 176MM(W) x 260MM(L)
- 2.2"(H) x 7.0"(W) x 10.2"(L)

# ACCESSORIES

## SPLIT-3003

MULTI-AUDIO AMPLIFIER

- INPUT IMPEDANCE: 47 KOHMS
- INPUT SENSITIVITY: 260MV
  - S/N RATIO: > 95DB
- OUTPUT LEVEL (10KHZ): > 1V(1KHZ)
- OUTPUT IMPEDANCE: 1 KOHMS
- CHANNEL RESOLUTION: > 60DB
- HARMONICS DISTORTION: 0.009%
- FREQUENCY RESPONSE: 20-2000HZ
  - OUTPUT GAIN: 12 DB

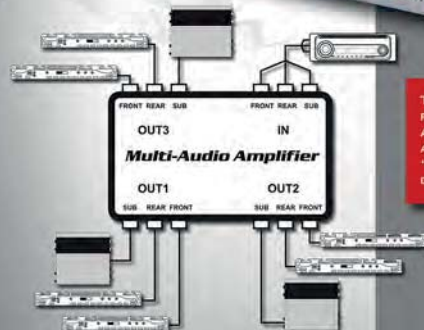

THIS UNIT ACCEPTS 3 RCA INPUTS FROM A HEAD UNIT "FRONT, REAR, AND SUBWOOFER" AND PROVIDES 3 AMPLIFIED OUTPUTS FOR EACH INPUT "3 FRONT OUTPUTS, 3 REAR OUTPUTS, 3 SUBWOOFER OUTPUTS".




## EMP SERIES

DUAL TWISTED PAIR RCA CABLES



EMP-17TW  
• 17 FT.

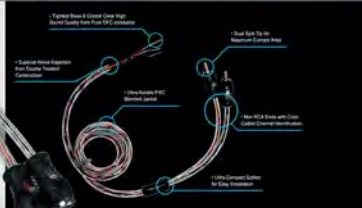

Interconnect Cables

EMP-3TW  
( 3 FT )

EMP-17TW  
( 17 FT )

EMP-Y-2FTW  
( 2 PCB/PACK )

EMP-Y-2MTW  
( 2 PCB/PACK )



EMP-3TW  
• 3 FT.



EMP-Y-2MTW



EMP-Y-2FTW

## CPM SERIES

CAR AUDIO INTERCONNECT CABLE



OXYGEN FREE HIGH QUALITY

- TIGHT BASS & CRYSTAL CLEAR HIGH SOUND QUALITY FROM PURE OFC CONDUCTOR
- SUPERIOR NOISE REJECTION FROM DOUBLE TWISTED CONSTRUCTIONS
- ULTRA-FLEXIBLE PVC BLENDED JACKET
- DUAL SPLIT TIPS FOR MAXIMUM CONTACT AREA
- MINI RCA ENDS WITH COLOR CODED CHANNEL IDENTIFICATION

Stereo Cables

- CPM-3 ( 3 FT.)
- CPM-6 ( 6 FT.)
- CPM-10 ( 10 FT.)
- CPM-12 ( 12 FT.)
- CPM-15 ( 15 FT.)
- CPM-20 ( 20 FT.)
- CPM-25 ( 25 FT.)
- CPM-CPM-Y-F-2M ( 10 FT.)
- CPM-Y-M-2F ( 10 FT.)



OXYGEN FREE

OXYGEN FREE HIGH QUALITY STEREO CABLE

- TIGHT BASS & CRYSTAL CLEAR HIGH SOUND QUALITY FROM PURE OFC CONDUCTOR
- SUPERIOR NOISE REJECTION FROM DOUBLE TWISTED CONSTRUCTIONS
- ULTRA-FLEXIBLE PVC BLENDED JACKET
- DUAL SPLIT TIPS FOR MAXIMUM CONTACT AREA
- MINI RCA ENDS WITH COLOR CODED CHANNEL IDENTIFICATION



CPP-Y-F-2M



CPP-Y-M-2F



CPP-3 ( 3 FT.)

CPP-6 ( 6 FT.)

CPP-10 ( 10 FT.)

CPP-12 ( 12 FT.)

CPP-15 ( 15 FT.)

CPP-20 ( 20 FT.)

CPP-25 ( 25 FT.)

CPP-Y-F-2M ( 10 FT.)

CPP-Y-M-2F ( 10 FT.)

## ACM-500

AUDIO CABLES

- OXYGEN FREE
- STEREO
- 500 FT (152.4 METERS)



### Nickel Contact Platinum RCA

#### PRCA-120 (plug)



#### PRCA-120 Jack



- AMP-1.5
- AMP-3
- AMP-6
- AMP-10
- AMP-12
- AMP-15
- AMP-17
- AMP-20
- AMP-25
- AMP-Y-F-2M
- AMP-Y-M-2F



- OXYGEN FREE HIGH HEAT RESISTANT RCA CABLES FOR AMPLIFIERS
- 24 KT. GOLD-PLATED RCA CONNECTORS
- EXCELLENT NOISE REJECTION
- CLEAR FLEXIBLE JACKET

- AMP-RA-3
- AMP-RA-6
- AMP-RA-17



- OXYGEN FREE HIGH HEAT RESISTANT RCA CABLES FOR AMPLIFIERS
- 24 KT. GOLD-PLATED RCA CONNECTORS
- EXCELLENT NOISE REJECTION
- CLEAR FLEXIBLE JACKET

CAR AUDIO

## CABLE SERIES

### AMP-PP-10

1/4" to RCA



### AMP-RA-35-6

3.5mm to RCA



### AMP-RA-3535-3

3.5mm to 3.5mm



### AMP-RR-018

- OXYGEN FREE 18" HIGH QUALITY STEREO CABLE
- OXYGEN FREE



90° RCA to 90° RCA



### AMP-RA-3535-6

- 6 FEET
- 3.5MM STEREO PLUG TO 3.5MM STEREO PLUG
- IPDQ® COMPATIBLE
- OXYGEN FREE

3.5mm to 3.5mm



### AMP-RA-3535-12

- 12 FEET
- 3.5MM STEREO PLUG TO 3.5MM STEREO PLUG
- IPDQ® COMPATIBLE
- OXYGEN FREE

3.5mm to 3.5mm



### AMP-3535-25

- 25 FEET
- 3.5MM STEREO PLUG TO 3.5MM STEREO PLUG
- IPDQ® COMPATIBLE
- OXYGEN FREE

3.5mm to 3.5mm





## BMS SERIES

BIN MASTER SERIES

### BMS-700X

#### 700 WATTS POWER KIT

- 17 FT. 2 RCA PLUGS TO 2 RCA PLUGS WITH SIGNAL WIRE
- 17 FT. 10 AWG RED PRIMARY WIRE
- 3 FT. 10 AWG BLACK PRIMARY WIRE
- 30 AMP ATC FUSE
- 10 AWG FUSE HOLDER
- GOLD RING TERMINAL RED COLOR
- GOLD RING TERMINAL BLACK COLOR
- GOLD PLATED SPADE TERMINAL BLACK COLOR
- GOLD PLATED SPADE TERMINAL RED COLOR
- BUTT SPLICES 2PCS
- 10 ASSORTED CABLE TIES
- 3 FT. SPLIT LOOM TUBING

**BMS**  
Bin Master Series

Allows for products to be conveniently stored for in-store shop installers.



### BMS-1500X

#### 1500 WATTS POWER KIT

- 17 FT. 2 RCA PLUGS TO 2 RCA PLUGS WITH SIGNAL WIRE
- 17 FT. 8 AWG RED PRIMARY WIRE
- 3 FT. 8 AWG BLACK PRIMARY WIRE
- 60 AMP AGU FUSE
- 25 FT. 18 AWG BREAKER WIRE
- 8 AWG FUSE HOLDER
- GOLD RING TERMINAL RED COLOR
- GOLD RING TERMINAL BLACK COLOR
- GOLD PLATED SPADE TERMINAL BLACK COLOR
- GOLD PLATED SPADE TERMINAL RED COLOR



### BMS-2100X

#### 2100 WATTS POWER KIT

- 17 FT. 2 RCA PLUGS TO 2 RCA PLUGS WITH SIGNAL WIRE
- 17 FT. 4 AWG RED PRIMARY WIRE
- 3 FT. 4V BLACK PRIMARY WIRE
- 80 AMP AGU FUSE
- 25 FT. 16 AWG SPEAKER WIRE
- AGU FUSE HOLDER
- GOLD RING TERMINAL RED COLOR
- GOLD RING TERMINAL BLACK COLOR
- GOLD PLATED SPADE TERMINAL BLACK COLOR
- GOLD PLATED SPADE TERMINAL RED COLOR
- BUTT SPLICES 2PCS
- 10 ASSORTED CABLE TIES
- 3 FT. SPLIT LOOM TUBING



## BMS SERIES

OXYGEN FREE CABLES

- OXYGEN FREE HIGH HEAT RESISTANT RCA CABLES FOR AMPLIFIERS
- 24 KT. GOLD-PLATED RCA CONNECTORS
- EXCELLENT NOISE REJECTION
- CLEAR FLEXIBLE JACKET

BMS-1.5  
BMS-3  
BMS-6  
BMS-10  
BMS-12  
BMS-15  
BMS-17  
BMS-20  
BMS-25



- OXYGEN FREE HIGH HEAT RESISTANT RCA CABLES FOR AMPLIFIERS.
- PLATINUM PLUGS WITH 24 KT. GOLD-PLATED CONNECTORS.
- HEAVY DUTY FLEXIBLE JACKET.
- PE FOAM, ALUMINUM FOIL.
- SPIRAL SHIELD DESIGN.

BMS-BLS-3  
BMS-BLS-6  
BMS-BLS-15  
BMS-BLS-17  
BMS-BLS-20  
BMS-BLS-YF-2M  
BMS-BLS-YM-2F

FLEXIBLE CABLES



### BMS-35-6

#### BMS-35-12

- 17 FT. 2 RCA PLUGS TO 2 RCA PLUGS WITH SIGNAL WIRE
- 17 FT. 8 AWG RED PRIMARY WIRE
- 3 FT. 8 AWG BLACK PRIMARY WIRE
- 60 AMP AGU FUSE
- 25 FT. 18 AWG BREAKER WIRE
- 8 AWG FUSE HOLDER
- GOLD RING TERMINAL RED COLOR
- GOLD RING TERMINAL BLACK COLOR
- GOLD PLATED SPADE TERMINAL BLACK COLOR
- GOLD PLATED SPADE TERMINAL RED COLOR



BMS-35-6  
BMS-35-12  
BMS-35-25  
BMS-35-5-6  
BMS-35-25-25  
BMS-YF-2M  
BMS-YM-2F

#### OXYGEN FREE RCA CABLE

- OXYGEN FREE HIGH HEAT RESISTANT RCA CABLES FOR AMPLIFIERS
- 24 KT. GOLD-PLATED RCA CONNECTORS
- EXCELLENT NOISE REJECTION
- CLEAR FLEXIBLE JACKET
- 3.5 MM TO 3.5MM



### BMS-RD1

#### CAR RADIO INSTALLATION KIT

- 12 14-16 GAUGE CRIMP CAPS
- 2 14-16 GAUGE RING TERMINALS
- 3 14-16 GAUGE BUTT CONNECTORS
- 2 1/2" SELF-TAPPING SCREWS
- 10 4" TIE-WRAPS



### BMS-RA 3

#### BMS-RA 6

#### BMS-RA 10

#### BMS-RA 12

#### BMS-RA 15

#### BMS-RA 20

#### BMS-RA-35-12

#### BMS-RA Y2F

#### BMS-RA M2M

#### BMS-RA F2M

#### OXYGEN FREE RCA CABLE

- OXYGEN FREE HIGH HEAT RESISTANT RCA CABLES FOR AMPLIFIERS
- 24 KT. GOLD-PLATED RCA CONNECTORS
- EXCELLENT NOISE REJECTION
- CLEAR FLEXIBLE JACKET



## SPEAKER CABLES

FREE POWER CABLES

CABLE#10 CLEAR 25' 10 GAUGE CLEAR <input type="radio"/>	CABLE#10 CLEAR 50' 10 GAUGE CLEAR <input type="radio"/>	CABLE#10 CLEAR 100' 10 GAUGE CLEAR <input type="radio"/>
CABLE#10 BLACK 100' 10 GAUGE BLACK <input checked="" type="radio"/>	CABLE#12 CLEAR 25' 12 GAUGE CLEAR <input type="radio"/>	CABLE#12 CLEAR 50' 12 GAUGE CLEAR <input type="radio"/>
CABLE#12 CLEAR 100' 12 GAUGE CLEAR <input type="radio"/>	CABLE#12 CLEAR 500' 12 GAUGE CLEAR <input type="radio"/>	CABLE#12 BLACK 500' 12 GAUGE BLACK/RED <input checked="" type="radio"/>
CABLE#14 CLEAR 25' 14 GAUGE CLEAR <input type="radio"/>	CABLE#14 CLEAR 50' 14 GAUGE CLEAR <input type="radio"/>	CABLE#14 CLEAR 100' 14 GAUGE CLEAR <input type="radio"/>
CABLE#14 CLEAR 500' 14 GAUGE CLEAR <input type="radio"/>	CABLE#14 BLACK 500' 14 GAUGE BLACK/RED <input checked="" type="radio"/>	CABLE#16 CLEAR 50' 16 GAUGE CLEAR <input type="radio"/>
CABLE#16 CLEAR 100' 16 GAUGE CLEAR <input type="radio"/>	CABLE#16 CLEAR 500' 16 GAUGE CLEAR <input type="radio"/>	CABLE#16 CLEAR 1000' 16 GAUGE CLEAR <input type="radio"/>
CABLE#16 BLACK 1000' 16 GAUGE BLACK/RED <input checked="" type="radio"/>	CABLE#18 CLEAR 25' 18 GAUGE CLEAR <input type="radio"/>	CABLE#18 CLEAR 50' 18 GAUGE CLEAR <input type="radio"/>
CABLE#18 CLEAR 100' 18 GAUGE CLEAR <input type="radio"/>	CABLE#18 CLEAR 500' 18 GAUGE CLEAR <input type="radio"/>	CABLE#18 CLEAR 1000' 18 GAUGE CLEAR <input type="radio"/>
CABLE#18 BLACK 1000' 18 GAUGE BLACK/RED <input checked="" type="radio"/>	CABLE#20 CLEAR 1000' 20 GAUGE CLEAR <input type="radio"/>	CABLE#20 BLACK 1000' 20 GAUGE BLACK/RED <input checked="" type="radio"/>
CABLE#22 CLEAR 1000' 22 GAUGE CLEAR <input type="radio"/>	CABLE#22 BLACK 1000' 22 GAUGE BLACK/RED <input checked="" type="radio"/>	CABLE#24 BLACK 1000' 24 GAUGE BLACK/CLEAR <input checked="" type="radio"/>
CABLE#24 CLEAR 1000' 24 GAUGE CLEAR <input type="radio"/>		



## SERIES

SPEAKER CABLES

### CABLE#128LS

- 500FT FREE POWER CABLE
- BLUE COLOR

### CABLE#148LS

- 500FT FREE POWER CABLE
- BLUE COLOR

### CABLE#168LS

- 500FT FREE POWER CABLE
- BLUE COLOR



CABLE#10 25FT  
SPEAKER CABLE - 25 FEET

CABLE#10 50FT  
SPEAKER CABLE - 50 FEET

CABLE#10 100FT  
SPEAKER CABLE - 100 FEET



CABLE#8  
CLEAR 300FT  
• SPEAKER CABLE  
• 300 FT. (91.44 METERS)  
• 8 GAUGE  
• CLEAR



CABLE#10  
CLEAR 300FT  
• SPEAKER CABLE  
• 300 FT. (91.44 METERS)  
• 10 GAUGE  
• CLEAR



## PS CABLES

OXYGEN FREE POWER CABLES

### PS-D-25 BLACK

- 25FT 0 GAUGE OXYGEN FREE POWER CABLE
- BLACK COLOR

### PS-D-25 BLUE

- 25FT 0 GAUGE OXYGEN FREE POWER CABLE
- BLUE COLOR

### PS-D-25 RED

- 25FT 0 GAUGE OXYGEN FREE POWER CABLE
- RED COLOR

### PS-D-100 BLACK

- 100FT 0 GAUGE OXYGEN FREE POWER CABLE
- BLACK COLOR

### PS-D-100 BLUE

- 100FT 0 GAUGE OXYGEN FREE POWER CABLE
- BLUE COLOR

### PS-D-100 RED

- 100FT 0 GAUGE OXYGEN FREE POWER CABLE
- RED COLOR



### AMP-BLS-17



- AMP-BLS-YF-2M
- AMP-BLS-YM-2F
- AMP-BLS-3
- AMP-BLS-6

- OXYGEN FREE HIGH HEAT RESISTANT RCA CABLES FOR AMPLIFIERS
- PLATINUM PLUGS WITH 24 KT. GOLD-PLATED CONNECTORS
- HEAVY DUTY FLEXIBLE JACKET
- PE FOAM, ALUMINUM FOIL
- SPIRAL SHIELD DESIGN



### PS-4B 250FT

- 250FT. 4 GAUGE OXYGEN FREE POWER CABLE
- BLUE COLOR

### PS-4R 250FT

- 250FT. 4 GAUGE OXYGEN FREE POWER CABLE
- RED COLOR

### PS-8B 250FT

- 250FT. 8 GAUGE OXYGEN FREE POWER CABLE
- BLUE COLOR

### PS-8R 250FT

- 250FT. 8 GAUGE OXYGEN FREE POWER CABLE
- RED COLOR



### PS-0 BL

- 100FT 0 GAUGE OXYGEN FREE POWER CABLE
- BLUE COLOR

### PS-0 25 BL

- 25FT 0 GAUGE OXYGEN FREE POWER CABLE
- BLUE COLOR

### PS-4 BL

- 250FT 4 GAUGE OXYGEN FREE POWER CABLE
- BLUE COLOR

### PS-8 BL

- 250FT 8 GAUGE OXYGEN FREE POWER CABLE
- BLUE COLOR

## PW SERIES

OXYGEN FREE POWER CABLES

### PW-D 25FT

- 25FT. 0 GAUGE OXYGEN FREE POWER CABLE
- AVAILABLE IN RED, BLACK, SILVER & BLUE.



### PW-D 100FT

- 100FT. 0 GAUGE OXYGEN FREE POWER CABLE
- AVAILABLE IN RED, BLACK, SILVER & BLUE.



### PW-4 100FT

- 100FT. 4 GAUGE OXYGEN FREE POWER CABLE
- AVAILABLE IN RED, BLACK, SILVER, BLUE & PURPLE.



### PW-4 250FT

- 250FT. 4 GAUGE OXYGEN FREE POWER CABLE
- AVAILABLE IN RED & BLUE.



### PW-8 250FT

- 250FT. 8 GAUGE OXYGEN FREE POWER CABLE
- AVAILABLE IN RED, BLACK, SILVER & BLUE.



### PW-10 250FT

- 250FT. 10 GAUGE OXYGEN FREE POWER CABLE
- AVAILABLE IN RED & BLACK.



### PW-6 100 RED

- PRIMARY WIRE
- 100 FT. (30.5 METERS)
- 6 GAUGE



### Q4P-R100

### Q4P-R250

- SPEED CABLE
- NINE 18-GAUGE OFHC WIRES IN BLACK JACKET, 8 EIA COLOR-CODED BREAKER WIRES, AND BLUE TURN-ON.
- CAN ALSO BE USED FOR ALARMS, HYDRAULICS, TRAILER HITCHES, ETC. HIGH TEMPERATURE CHEMICAL RESISTANT CLEAR JACKET.
- 100 / 250 FT. ROLL.



## AP CABLES

### PRIMARY CABLES

#### AP-12-500

500' / 12 GAUGE PRIMARY WIRE AVAILABLE IN BLACK, BLUE, YELLOW, GREEN, RED, WHITE AND ORANGE.



### PRIMARY WIRES

## AP SERIES

#### AP-16-500

500' / 16 GAUGE PRIMARY WIRE AVAILABLE IN BLACK, BLUE, YELLOW, GREEN, RED, WHITE AND ORANGE



#### AP-14-500

500' / 14 GAUGE PRIMARY WIRE AVAILABLE IN BLACK, BLUE, YELLOW, GREEN, RED, WHITE, ORANGE & PURPLE

#### AP-18-500

500' / 18 GAUGE PRIMARY WIRE AVAILABLE IN BLACK, BLUE, YELLOW, GREEN, GRAY, RED, WHITE, ORANGE, PURPLE & BROWN





## AP CABLES

OXYGEN FREE POWER CABLES

### AP-10-100

100' 10 GAUGE PRIMARY WIRE AVAILABLE IN BLACK, BLUE, YELLOW, WHITE, GREEN AND RED



### AP-12-100

100' 12 GAUGE PRIMARY WIRE AVAILABLE IN BLACK, BLUE, RED, GRAY, WHITE, GREEN, PURPLE, BROWN AND YELLOW



PRIMARY WIRES

## AP SERIES

### AP-14-100

100' 14 GAUGE PRIMARY WIRE AVAILABLE IN BLACK, BLUE, YELLOW, GRAY, ORANGE, GREEN, PURPLE, BROWN AND RED



### AP-16-100

100' 16 GAUGE PRIMARY WIRE AVAILABLE IN BLACK, BLUE, YELLOW, GRAY, GREEN, ORANGE, BROWN, PURPLE & BLUE



### AP-18-100

100' 18 GAUGE PRIMARY WIRE AVAILABLE IN RED, BLUE, YELLOW, GRAY, PURPLE, GREEN, ORANGE, BROWN, PINK, WHITE AND BLACK



# ACCESSORIES

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## AIQ-USBLI-3LED/10LED

USB CHARGE/SYNC CABLE

1M/3 FT USB Charge / Sync Cable / LED

- LED STATUS INDICATOR
- RED INDICATES CHARGING;
  - BLUE INDICATES CHARGING IS COMPLETE.
  - 3" / 10"

**SPECIFICATIONS:**

- MADE FOR:
- IPHONE 6S PLUS
  - IPHONE 6S
  - IPHONE 6 PLUS
  - IPHONE 6
  - IPHONE 5S
  - IPHONE 5C
  - IPHONE 5
  - IPAD AIR 2
  - IPAD AIR
  - IPAD MINI 3,
  - IPAD MINI 2
  - IPAD MINI
  - IPOD TOUCH (6TH GEN)
  - IPOD TOUCH (5TH GEN)



**New Products 2016**

Made for  
 iPod  iPhone  iPad

1M/10 FT USB Charge / Sync Cable / LED



**LED**

**New Products 2016**



# ACCESSORIES

## AIQ-USBLI-3

3 FT USB Charge / Sync Cable

- SYNC CABLE

MADE FOR:

- IPHONE 6 PLUS
- IPHONE 6
- IPHONE 5S
- IPHONE 5C
- IPHONE 5
- IPAD AIR 2
- IPAD AIR
- IPAD (4TH GEN)
- IPAD MINI3
- IPAD MINI2
- IPAD MINI
- IPOD TOUCH (5TH GEN)
- IPOD NANO (7TH GEN)

**New Products 2016**

**Official Licensed Product**


Made for  
 iPod  iPhone  iPad



USB A plug to micro USB plug retractable cable

### AIQ-R-UMU-3

- NICKEL PLATED
- METAL POLISHED HEAD
- SHIELDED FOR NOISE REJECTION
- SUPERIOR FLEXIBILITY



**RETRACTABLE**



3.5mm plug to 3.5mm plug retractable cable

### AIQ-R3535-3

- NICKEL PLATED
- METAL POLISHED HEAD
- SHIELDED FOR NOISE REJECTION
- SUPERIOR FLEXIBILITY



**RETRACTABLE**





## AIQ-SV3535-3.5

USB CHARGE/SYNC CABLE

### 3 Flat Audio/Video Cable

- FLAT AUDIO/VIDEO CABLE
- HEADPHONE CABLE
- 3.5MM JACK PLUG TO 3.5MM JACK PLUG
- GOLD PLATED



## AIQ-USBMI-3

### 3 FT USB Charge / Sync Cable

USE WITH COMPATIBLE BRANDS LIKE SAMSUNG/ NOKIA/ HTC/ HUAWEI/ MOTOROLA/ LG. TO ACHIEVE SYNCHRONOUS DATA TRANSFER AND CHARGING FUNCTION, STABLE PERFORMANCE EASY TO USE.

Made for



Android OS

**New Products  
2016**



### 3.5mm Plug to 3.5mm Plug

AIQ-S3535-3  
AIQ-S3535-6  
AIQ-S3535-12  
AIQ-S3535-25

- GOLD PLATED
- METAL POLISHED HEAD
- SHIELDED FOR NOISE REJECTION
- SUPERIOR FLEXIBILITY

### 3.5mm Plug to 2 RCA Male

AIQ-S35RCA-3  
AIQ-S35RCA-6

- GOLD PLATED
- METAL POLISHED HEAD
- SHIELDED FOR NOISE REJECTION
- SUPERIOR FLEXIBILITY



### 3.5mm jack plug to 3.5mm jack plug

AIQ-FLT3535

- FLAT AUDIO HEADPHONE CABLE
- GOLD PLATED



### 1 RCA Male to 1 RCA Male

AIQ-SRCA-3

AIQ-SRCA-6

- VIDEO CABLE
- GOLD PLATED
- METAL POLISHED HEAD
- SHIELDED FOR NOISE REJECTION
- SUPERIOR FLEXIBILITY



## EBT-0488P

AP ACCESSORIES LINE



### MULTI-OUTPUT BATTERY TERMINAL

- ONE 1/0GA OUTPUT
- ONE 4GA OUTPUT
- TWO 8GA OUTPUT
- HIGH-TEMPERATURE POLYCARBONATE COVER
- ALL BRASS CONSTRUCTION WITH SATIN-CHROME PLATING



### EBT-0488N Negative

- MULTI-OUTPUT BATTERY TERMINAL
- ONE 1/0GA OUTPUT
- ONE 4GA OUTPUT
- TWO 8GA OUTPUT
- HIGH-TEMPERATURE POLYCARBONATE COVER
- ALL BRASS CONSTRUCTION WITH SATIN-CHROME PLATING

EDB-1044



1 in 4 out

### POWER/GROUND DISTRIBUTION BLOCK

- ONE INPUT: 1/0 OR 4 GAUGE
- FOUR OUTPUTS: 4 OR 8 GAUGE
- HIGH-TEMPERATURE POLYCARBONATE BASE AND COVER
- ALL-BRASS CONSTRUCTION WITH SATIN CHROME PLATING



AGU Fuse Holder

### AGU Fuse Holder

#### ANL FUSE HOLDER

- ACCEPTS 1/0 GAUGE OR 4 GAUGE WIRE
- HIGH-TEMPERATURE POLYCARBONATE BASE AND COVER
- ALL-BRASS CONSTRUCTION WITH SATIN CHROME PLATING



ANL TYPE FUSE

### EFB-240B4ANL

#### 2 POSITION ANL FUSED DISTRIBUTION BLOCK

- ONE INPUT: 1/0 OR 4 GAUGE
- TWO OUTPUTS: 1/0 OR 4 GAUGE
- HIGH-TEMPERATURE POLYCARBONATE BASE AND COVER
- ALL-BRASS CONSTRUCTION WITH SATIN CHROME PLATING



ANL TYPE FUSE

### EFB-340B4ANL

#### 3 POSITION ANL FUSED DISTRIBUTION BLOCK

- THREE OUTPUTS: 1/0 OR 4 GAUGE
- HIGH-TEMPERATURE POLYCARBONATE BODY AND COVER
- ALL-BRASS CONSTRUCTION WITH SATIN CHROME PLATING



AFC FUSE HOLDER

### EFH-1414

#### POSITIVE AFC FUSE HOLDER

- ACCEPTS 4 GAUGE OR 8 GAUGE WIRE
- HIGH-TEMPERATURE POLYCARBONATE BASE AND COVER
- ALL-BRASS CONSTRUCTION WITH SATIN CHROME PLATING



ANL TYPE FUSE

### EFH-1040ANL

#### ANL FUSE HOLDER

- ACCEPTS 1/0 GAUGE OR 4 GAUGE WIRE
- HIGH-TEMPERATURE POLYCARBONATE BASE AND COVER
- ALL-BRASS CONSTRUCTION WITH SATIN CHROME PLATING

## EFH-1084AGU



# ACCESSORIES

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## CQ-ADATM-16

### ATM

#### FUSE HOLDER

- 1.6GA UL CABLE
- TOTAL LENGTH: 1.6 CM
- RATE CURRENT: 1.5A MAX.
- TERMINAL: SPRING BRASS



## CQ-ADAST-16

### AST

#### MINI ADD A FUSE HOLDER TAP

- B = 20A
- C = 100MΩ MIN
- D = 5MΩ AT 1A DC
- E = AC 1000V MIN
- F = NYLON
- G = #16-UL 1D15 RED WIRE #14-UL 3266 RED WIRE



## CQ-ADATC-16

### ATC

#### ADD A FUSE HOLDER TAP HOLDER

- B = 20A
- D = 100MΩ MIN
- D = 5MΩ AT 1A DC
- E = AC 1000V MIN
- F = NYLON
- G = #16-UL 1D15 RED WIRE #14-UL 3266 RED WIRE



## AQK-12

- QUICK DISCONNECT POWER CABLE
- 12" LONG 2 PIN 10GA WIRE

## AQK-12-10GB

- QUICK DISCONNECT POWER CABLE
- 12" LONG 2 PIN 10GA WIRE
- BAG PACKING



## AQK-12-88G

- QUICK DISCONNECT POWER CABLE
- 12" LONG 2 PIN 8GA WIRE
- BAG PACKING

## AQK-12-12BG

- QUICK DISCONNECT POWER CABLE
- 12" LONG 2 PIN 12GA WIRE
- BAG PACKING

## AGU

### TYPE FUSE

#### GOLD PLATED MIDGET CAR FUSES

- 10.38 x 38.10mm (13/32 x 1-1/2 INCH)
- VOLTAGE RATING: 32V/ 125V/ 250V
- AMPERE RATING:

1	7-1/2	35
2	10	40
3	15	50
4	20	60
5	25	70
6	30	80

- 5 PCS PER BLISTER PACK



## ANL

### TYPE FUSE

#### GOLD PLATED HIGH PERFORMANCE FUSES

- VISIBLE THROUGH MICA WINDOW
- VOLTAGE RATING: 32V
- AMPERE RATING:

60	175
70	200
80	225
100	250
130	300
150	

- 2 PCS PER BLISTER



## AFC TYPE FUSE (MIDI)

### MIDGET CAR FUSES

- TRANSPARENT BODY
  - VOLTAGE RATING: 32V
  - AMPERE RATING:
- |    |     |
|----|-----|
| 30 | 80  |
| 40 | 100 |
| 50 | 120 |
| 60 | 150 |
| 70 |     |

- 5 PCS PER BLISTER PACK



## MAXI

### TYPE FUSE

#### TERMINAL CAR FUSES

- TRANSPARENT BODY
  - VOLTAGE RATING: 32V
  - AMP. RATING BODY COLOR
- |         |           |
|---------|-----------|
| 3 A     | VIOLET    |
| 4 A     | PINK      |
| 5 A     | TAN       |
| 7-1/2 A | BROWN     |
| 10 A    | RED       |
| 15 A    | LT. BLUE  |
| 20 A    | YELLOW    |
| 25 A    | NATURAL   |
| 30 A    | LT. GREEN |

- 10 PCS PER BLISTER PACK



## ATM-LPM

### LOW-PROFILE MINI FUSE

- TRANSPARENT BODY
  - VOLTAGE RATING: 32V
  - AMP. RATING BODY COLOR
- |            |    |        |
|------------|----|--------|
| ATM-LPM-10 | 10 | RED    |
| ATM-LPM-15 | 15 | BLUE   |
| ATM-LPM-20 | 20 | YELLOW |
| ATM-LPM-25 | 25 | CLEAR  |
| ATM-LPM-30 | 30 | GREEN  |

- 10 PCS PER BLISTER PACK



# ACCESSORIES

## AST MINI-BLADE TYPE

### TERMINAL CAR FUSES

- TRANSPARENT BODY
  - VOLTAGE RATING: 32V
  - AMPERE RATING BODY COLOR
- |         |           |
|---------|-----------|
| 3 A     | VIOLET    |
| 4 A     | PINK      |
| 5 A     | TAN       |
| 7-1/2 A | BROWN     |
| 10 A    | RED       |
| 15 A    | LT. BLUE  |
| 20 A    | YELLOW    |
| 25 A    | NATURAL   |
| 30 A    | LT. GREEN |

- 5 PCS PER BLISTER PACK



## ATC

### TYPE FUSE

#### TERMINAL CAR FUSES

- TRANSPARENT BODY
  - VOLTAGE RATING: 32V
  - AMP. RATING BODY COLOR
- |      |             |
|------|-------------|
| 20 A | YELLOW      |
| 30 A | LT. GREEN   |
| 35 A | LT. RED     |
| 40 A | ORANGE      |
| 50 A | RED         |
| 60 A | LT. BLUE    |
| 70 A | TAN         |
| 80 A | TRANSPARENT |

- 5 PCS PER BLISTER PACK



## CQ-1100

FUSE BLOCK



**HIGH CAPACITY**



ECONOMIC TYPE ANE (ANL) FUSE BLOCK

- 24 KT. GOLD FINISH.
- USES ANE (ANL) FUSE UP TO 500 AMPS.
- ACCEPTS 0 TO 4 GAUGE CABLE WIRE.
- CLEAR SNAP-ON DUST COVER.



### CQ-1111

ANL Fuse

- HEAVY DUTY ANE (ANL) FUSE BLOCK
- 24 KT. GOLD FINISH SCREWS.
  - USES ANE (ANL) FUSE UP TO 500 AMPS.
  - ACCEPTS 0 TO 4 GAUGE CABLE WIRE.
  - CLEAR SNAP-ON DUST COVER.
  - BASE IS PRECISION MACHINED.

FUSE HOLDER

## FAFC-1024



### 2 Position

- PLATINUM FINISH SCREWS
- ACCEPTS TWO AFC FUSES
- ONE 4 GAUGE INPUTS AND TWO 8 GAUGE OUTPUTS
- INNER STEP ENSURES A PERFECT RECESSED FIT CABLE INTO BLOCK.
- PLATINUM BASE IS PRECISION MACHINED.



## BTP-705N BTP-705P

INNER STEPS ENSURE PERFECT RECESSED FIT INTO BLOCK

- 24 KT. GOLD FINISH SCREWS.
- HAS 4 SEPARATE OUTPUTS : ONE 0 GAUGE, ONE 4 GAUGE INPUT & TWO 8 GAUGE.
- INNER STEP ENSURES A PERFECT RECESSED FIT CABLE INTO BLOCK.
- PLATINUM BASE IS PRECISION MACHINED.



**HIGH CAPACITY**



## BTD-800N BTD-800P

MULTI FEED CONNECTION BATTERY TERMINAL

- NEGATIVE
- 24 KT. GOLD FINISH SCREWS.
- HAS 4 SEPARATE OUTPUTS : ONE 0 GAUGE, ONE 4 GAUGE INPUT & TWO 8 GAUGE.
- INNER STEP ENSURES A PERFECT RECESSED FIT CABLE INTO BLOCK.
- PLATINUM BASE IS PRECISION MACHINED.

MULTI FEED CONNECTION BATTERY TERMINAL SYSTEM WITH DIGITAL DISPLAY

- POSITIVE
- 24 KT. GOLD FINISH SCREWS.
- HAS 4 SEPARATE OUTPUTS : ONE 0 GAUGE, ONE 4 GAUGE INPUT & TWO 8 GAUGE.
- INNER STEP ENSURES A PERFECT RECESSED FIT CABLE INTO BLOCK.
- PLATINUM BASE IS PRECISION MACHINED.

eye  
CANDY



**HIGH CAPACITY**



### FAFC-2044

4 POSITION AFC FUSE HOLDER

- PLATINUM FINISH SCREWS
- ACCEPTS 4 AFC FUSES
- TWO 4 GAUGE INPUTS AND TWO 8 GAUGE OUTPUTS
- INNER STEP ENSURES A PERFECT RECESSED FIT CABLE INTO BLOCK.
- PLATINUM BASE IS PRECISION MACHINED.






## PB-2010XT

### POWER DISTRIBUTION BLOCK

- 24 KT. GOLD FINISH
- BASE IS PRECISION MACHINED
- 2 "0" GAUGE IN 1 STUD TO AMP TERMINAL
- MULTIPLE POWER INPUTS



## PB-5010XT

### POWER DISTRIBUTION BLOCK

- 24 KT. GOLD FINISH
- BASE IS PRECISION MACHINED
- 5 "0" GAUGE IN 1 STUD TO AMP TERMINAL
- MULTIPLE POWER INPUTS



## PB-1020

### 1 TO 2 POWER DISTRIBUTION BLOCK

- 24 KT. GOLD FINISH
- ONE 0 OR 4 GAUGE INPUT AND TWO 0 OR 4 GAUGE OUTPUTS
- INNER STEPS ENSURE PERFECT RECESSED FIT OF 0 AND 4 GAUGE CABLE
- BASE IS PRECISION MACHINED



## PB-1448

### 1 TO 4 POWER DISTRIBUTION BLOCK

- 24 KT. GOLD FINISH
- ONE 4 GAUGE INPUT AND FOUR 8 GAUGE OUTPUTS
- INNER STEP ENSURE PERFECT RECESSED FIT OF 4 AND 8 GAUGE POWER CABLE INTO BLOCK.
- NET WEIGHT: 160 GRAM.
- BASE IS PRECISION MACHINED.



## PB-1044

### 1 TO 4 POWER DISTRIBUTION BLOCK

- 24 KT. GOLD FINISH.
- ONE 1/0 GAUGE INPUT AND FOUR 4 GAUGE OUTPUTS.
- INNER STEP ENSURE PERFECT RECESSED FIT OF 4 AND 8 GAUGE CABLE.
- NET WEIGHT: 160 GRAM.
- BASE IS PRECISION MACHINED.



## BT-200P

### BATTERY TERMINAL

- 24 KT. GOLD FINISH.
- AVAILABLE IN POSITIVE OR NEGATIVE.
- ACCEPTS 5/16" RING TERMINALS ON TOP AND ONE 8 GAUGE WIRE ON EACH SIDE.
- BT-200P POSITIVE
- BT-200N NEGATIVE



## TERMINALS

## BT-100P

## BT-100N

### WASHER TERMINAL

- 24 KT. GOLD FINISH.
- AVAILABLE IN POSITIVE OR NEGATIVE.
- ACCEPTS 5/16" RING TERMINAL.
- BT-100P POSITIVE
- BT-100N NEGATIVE



## BT-300

### BATTERY SIDE POST EXTENDER

- 24 KT. GOLD FINISH.
- MOUNT LEADS DIRECTLY TO BATTERY.
- NET WEIGHT: 40 GRAM.



## BT-350

### BATTERY SIDE POST EXTENDER

- 24 KT. GOLD FINISH.
- MOUNT LEADS DIRECTLY TO BATTERY.
- NET WEIGHT: 50 GRAM.



## BT-400

### BATTERY SIDE POST TERMINAL

- 24 KT. GOLD FINISH.
- NET WEIGHT: 50 GRAM.



## BTC-1-0

## BTC-1-4

## BTC-1-8

### HEAVY DUTY RING TERMINAL

- RING TERMINAL WITH 24 KT. GOLD FINISH.
- SET SCREW DESIGN, NO CRIMPING REQUIRED.
- AVAILABLE IN 3 DIFFERENT WIRE SIZES.
- BT-1-0 1/0
- BT-1-4 4
- BT-1-8 8



## BT-705P

## BT-705N

### MULTI-FEED BATTERY CONNECTIONS SYSTEM

- MULTI-FEED BATTERY TERMINALS.
- UNIQUE DESIGN ALLOWS UP TO 4 POWER CABLES TO BE CONNECTED DIRECTLY TO THE BATTERY POST.
- PRECISION MACHINED.
- 24 KT. GOLD FINISH.
- AVAILABLE IN POSITIVE OR NEGATIVE TERMINAL MODELS.
- HAS 4 SEPARATE OUTPUTS : ONE UP TO 1/0 GAUGE, ONE / 2 GAUGE, TWO / 8 GAUGE.
- INNER STEP ENSURE PERFECT RECESSED FIT OF CABLE INTO BLOCK.



## NQ-604

## NQ-6

### IN-LINE AFC FUSE HOLDER

- 1 FT. (0.3M) 4GA RED POWER CABLE
- GOLD N2 TYPE FUSE HOLDER
- GOLD PLATED 60A AFC FUSE
- GOLD BASE IS PRECISION MACHINED



AFC Fuse Holder

### IN-LINE AFC FUSE HOLDER

- UNIQUE SEE-THRU MATERIAL.
- ALL METAL PARTS ARE 24 KT. PLATE FINISH.
- ACCEPTS AFC FUSE UP TO 80 AMPS.
- PERFECT FIT FOR 4 GAUGE POWER CABLE.
- BASE IS PRECISION MACHINED.



AFC Fuse Holder

## N5-C CLEAR

### IN-LINE AGU FUSE HOLDER

- UNIQUE SEE-THRU MATERIAL.
- CLEAR HOUSING WITH MOUNTING CLIP.
- ALL METAL PARTS ARE 24 KT. GOLD FINISH.
- ACCEPTS AGU FUSE UP TO 80 AMPS.
- PERFECT FIT FOR 4 GAUGE POWER CABLE.
- SET SCREW DESIGN - NO CRIMPING REQUIRED.
- BASE IS PRECISION MACHINED.



AGU Fuse Holder



## N108L

### IN-LINE AGU FUSE HOLDER WITH BLUE LED

- UNIQUE SEE-THRU MATERIAL.
- CLEAR HOUSING WITH MOUNTING CLIP.
- ALL METAL PARTS ARE 24 KT. GOLD FINISH.
- ACCEPTS AGU FUSE UP TO 80 AMPS.
- PERFECT FIT FOR 4 GAUGE POWER CABLE.
- SET SCREW DESIGN - NO CRIMPING REQUIRED.
- BASE IS PRECISION MACHINED.
- WITH BLUE LED



AGU Fuse Holder



eye™  
CANDY

## FUSES

## CQ-6204

### HEAVY DUTY AGU FUSE HOLDER

- 1 FT. (0.3M) 4GA RED POWER CABLE
- GOLD N2 TYPE FUSE HOLDER
- GOLD PLATED 60A AGU FUSE
- GOLD BASE IS PRECISION MACHINED



## CQ-6208

### HEAVY DUTY AGU FUSE HOLDER

- 1 FT. (0.3M) 8GA RED POWER CABLE
- GOLD N2 TYPE FUSE HOLDER
- GOLD PLATED 60A AGU FUSE
- GOLD BASE IS PRECISION MACHINED



AGU Fuse Holder

with  
CABLE



## CQ-2300

### HEAVY DUTY ANE (ANL) FUSE HOLDER

- WATER RESISTANT.
- ALL METAL PARTS ARE 24 KT. GOLD FINISH.
- USE ANE (ANL) FUSE UP TO 300 AMPS.
- ACCEPTS 0 TO 4 GAUGE CABLE WIRE.
- CLEAR HOUSING INCLUDES TWO NYLON COVERS.



ANE Type Fuse

## CQ-7304P

### BLUE HEAVY DUTY AGU FUSE HOLDER WITH LED

- 1 FT. (0.3M) 4GA BLUE POWER CABLE
- PLATINUM AGU TYPE FUSE HOLDER
- PLATINUM 60A AGU FUSE
- WITH BLUE LED STATUS INDICATOR
- PRECISION MACHINED

eye™  
CANDY



AGU Fuse Holder

with  
CABLE



# ACCESSORIES

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## AFG-P1414



### POWER DISTRIBUTION BLOCK

- DISTRIBUTES POSITIVE AND NEGATIVE CABLE CONNECTIONS
- ACCEPTS ONE 0 OR 4 GAUGE INPUT AND FOUR 8 GAUGE OUTPUTS
- WITH SUPER BRIGHT LED
- 24 KT. GOLD FINISH SCREWS
- PLATINUM BASE IS PRECISION MACHINED
- BLOCK BOTTOM HOUSING ADDS EYE CANDY EFFECT
- AFC TYPE FUSE

## PDC-P1414



### EYE CANDY

### POWER DISTRIBUTION BLOCK

- DISTRIBUTES POSITIVE AND NEGATIVE CABLE CONNECTIONS
- ACCEPTS ONE 0 OR 4 GAUGE INPUT AND TWO 4 OR 8 GAUGE OUTPUTS
- WITH SUPER BRIGHT LED
- 24 KT. GOLD FINISH SCREWS
- PLATINUM BASE IS PRECISION MACHINED
- BLOCK BOTTOM HOUSING ADDS EYE CANDY EFFECT
- AGU TYPE FUSE

# ACCESSORIES

## FUSE BLOCKS



### CQ-3422P

- 2 POSITION ANL FUSE BLOCK
- ACCEPTS ONE 0 OR 4 GAUGE INPUT AND TWO 4 OR 8 GAUGE OUTPUTS
- WITH SUPER BRIGHT BLUE LED STATUS INDICATOR
- 24 KT. GOLD FINISH SCREWS
- PLATINUM BASE IS PRECISION MACHINED
- BLACK BOTTOM HOUSING ADDS EYE CANDY EFFECT



### CQ-3422PD

- 2 POSITION ANL FUSE BLOCK
- ACCEPTS ONE 0 OR 4 GAUGE INPUT AND TWO 4 OR 8 GAUGE OUTPUTS
- WITH DIGITAL VOLTMETER AND SUPER BRIGHT LED
- 24 KT. GOLD FINISH SCREWS
- PLATINUM BASE IS PRECISION MACHINED
- BLACK BOTTOM HOUSING ADDS EYE CANDY EFFECT



### CQ-1221P

#### ANL FUSE BLOCK

- ACCEPTS ONE 0 GAUGE OR 4 GAUGE INPUT AND 0 OR 4 GAUGE OUTPUT
- WITH SUPER BRIGHT BLUE LED STATUS INDICATOR
- 24 KT. GOLD FINISH SCREWS
- PLATINUM BASE IS PRECISION MACHINED
- BLACK BOTTOM HOUSING ADDS EYE CANDY EFFECT



### CQ-1221PD

#### ANL FUSE BLOCK

- ACCEPTS ONE 0 OR 4 GAUGE INPUT AND ONE 0 OR 4 GAUGE OUTPUT
- WITH DIGITAL VOLTMETER AND SUPER BRIGHT LED
- 24 KT. GOLD FINISH SCREWS
- PLATINUM BASE IS PRECISION MACHINED
- BLACK BOTTOM HOUSING ADDS EYE CANDY EFFECT

### N5P-80

- 80 AMP MANUAL RESET CIRCUIT BREAKER
- 24 KT. GOLD FINISH SCREWS.
- PERFECT FIT FOR 4 GAUGE POWER CABLE.
- INCLUDES COLLAR ADAPTOR FOR 8 GAUGE POWER CABLE.
- PLATINUM BASE IS PRECISION MACHINED.

### N5P-200

- 200 AMP MANUAL RESET CIRCUIT BREAKER
- 24 KT. GOLD FINISH SCREWS.
- PERFECT FIT FOR 4 GAUGE POWER CABLE.
- INCLUDES COLLAR ADAPTOR FOR 8 GAUGE POWER CABLE.
- PLATINUM BASE IS PRECISION MACHINED.

### N5P-150

- 150 AMP MANUAL RESET CIRCUIT BREAKER
- 24 KT. GOLD FINISH SCREWS.
- PERFECT FIT FOR 4 GAUGE POWER CABLE.
- INCLUDES COLLAR ADAPTOR FOR 8 GAUGE POWER CABLE.
- PLATINUM BASE IS PRECISION MACHINED.



## P-119BL



**HIGH CAPACITY**



GOLD RCA JACK TO RCA JACK CONNECTOR WITH PLASTIC BODY

• 4 PCS PACK QTY - AVAILABLE IN BLISTER

## P-120BL

GOLD RCA PLUG TO RCA PLUG CONNECTOR WITH PLASTIC BODY  
• 4 PCS PACK QTY



**HIGH CAPACITY**



## P-121BL

GOLD RIGHT ANGLE RCA JACK TO RCA PLUG CONNECTOR WITH PLASTIC BODY  
• 4 PCS PACK QTY  
AVAILABLE IN BLISTER



**HIGH CAPACITY**



## Q-119

• GOLD RCA PLUG TO RCA PLUG CONNECTOR  
• 2 PCS PACK QTY - AVAILABLE IN BLISTER

**HIGH CAPACITY**



## Q-120

• GOLD RCA JACK TO RCA JACK CONNECTOR  
• 2 PCS PACK QTY - AVAILABLE IN BLISTER

**HIGH CAPACITY**



## Q-121

• GOLD RIGHT ANGLE RCA JACK TO RCA PLUG CONNECTOR  
• 2 PCS PACK QTY - AVAILABLE IN BLISTER



**HIGH CAPACITY**



## CXR-303



**HIGH CAPACITY**

## CXR-203

2 WAY PASSIVE CROSSOVER NETWORK  
• GOLD PLATED SCREW TERMINALS  
• 150 WATTS RMS/ 300 WATTS PEAK  
• HIGH GRADE POLYMER CAPACITORS  
• FERRITE AND AIR COOLED SPOOLS  
• WOOFER FREQUENCY: 20HZ-5.6KHZ  
• TWEETER FREQUENCY: 5KHZ-20KHZ  
• 12DB PER OCTAVE SLOPE (4 Q)  
• ENCLOSED ABS CABINET



**HIGH CAPACITY**

3 WAY PASSIVE CROSSOVER NETWORK  
• GOLD PLATED SCREW TERMINALS  
• 150 WATTS RMS/ 300 WATTS PEAK  
• HIGH GRADE POLYMER CAPACITORS  
• FERRITE AND AIR COOLED SPOOLS  
• WOOFER FREQUENCY: 20HZ-800HZ  
• MIDRANGE FREQUENCY: 700HZ-4KHZ  
• TWEETER FREQUENCY: 5KHZ-20KHZ  
• 12DB PER OCTAVE SLOPE (4 Q)  
• ENCLOSED ABS CABINET

## BB-14

14 $\mu$ F FOR 3.5" TO 4" SPEAKER

2.8KHZ @4Q

## BB-99

99 $\mu$ F FOR 5 1/4" TO 6 1/2" SPEAKER

400HZ @4Q

## BB-133

133 $\mu$ F FOR 6"X9" -5"X7" -6"X8" SPEAKER

300HZ @4Q

## BB-199

199 $\mu$ F FOR 10" SPEAKER

200HZ @4Q



## BB-2.2

100V 2.2 $\mu$ F FOR 1" TWEETERS AND ABOVE

## BB-3.3

100V 3.3 $\mu$ F FOR 1" TWEETERS AND ABOVE

## BB-4.7

100V 4.7 $\mu$ F FOR 1" TWEETERS AND ABOVE



**New Products 2016**

**HIGH CAPACITY**



## ACAP-2000



### POWER CAPACITORS



#### 2 Farad Power Capacitor

- VDC: 20MAX. 24V SURGE
- ESR: 0.002 Ω OR LESS
- DISPLAY & STATUS INDICATOR
- DIGITAL ELECTRONIC PROTECTION



#### ACAP-3500

- 3.5 FARAD POWER CAPACITOR
- VDC: 20MAX. 24V SURGE
  - ESR.: 0.002 Ω OR LESS
  - DISPLAY & STATUS INDICATOR
  - DIGITAL ELECTRONIC PROTECTION

#### ACAP-6000

- 6.0 FARAD POWER CAPACITOR
- VDC: 20MAX. 24V SURGE
  - ESR.: 0.002 Ω OR LESS
  - DISPLAY & STATUS INDICATOR
  - DIGITAL ELECTRONIC PROTECTION



## CIRCUIT BREAKER

#### CB-100A

MANUALLY RESETTABLE CIRCUIT BREAKER

- 100 AMP
- PLATINUM PLATED TERMINALS
- WATER RESISTANT
- HIGH HEAT/HIGH TEMP RESISTANT
- 12V



#### CB-150A

MANUALLY RESETTABLE CIRCUIT BREAKER

- 150 AMP
- PLATINUM PLATED TERMINALS
- WATER RESISTANT
- HIGH HEAT/HIGH TEMP RESISTANT
- 12V



#### CB-200A

MANUALLY RESETTABLE CIRCUIT BREAKER

- 200 AMP
- PLATINUM PLATED TERMINALS
- WATER RESISTANT
- HIGH HEAT/HIGH TEMP RESISTANT
- 12V



# ACCESSORIES

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## PK-2150CPR

COPPER SERIES

### SPECIFICATIONS

POWER	2150 WATTS
PRIMARY WIRE I	17' 4 AWG RED
PRIMARY WIRE II	3' 4 AWG BLACK
SPEAKER WIRE	25' 16 AWG BLUE
FUSE	100 AMP AFC
FUSE HOLDER	NQ-6
LOOM TUBING	3' SPLIT LOOM TUBING
CABLE TIES	10 ASSORTED

### AMPLIFIER INSTALLATION KIT

- 17 FT. 2 RCA PLUGS TO 2 RCA PLUGS WITH SIGNAL WIRE
- GOLD TERMINAL RED COLOR
- GOLD TERMINAL BLACK COLOR
- GOLD SPADE TERMINAL BLACK COLOR
- GOLD SPADE TERMINAL RED COLOR
- BUT SPLICES 2PCS



**INSTALLATION KITS**



# ACCESSORIES

GOLD SERIES

## PK-2100SX

- 17 FT. 2 RCA PLUGS TO 2 RCA PLUGS WITH SIGNAL WIRE
- 17 FT. 4 GA RED POWER WIRE
- 3 FT. 4 GA BLACK POWER WIRE
- 25 FT. 16 AWG SPEAKER WIRE
- 80 AFC FUSE
- 25FT. 16AWG SPEAKER WIRE
- AFC FUSE HOLDER
- NQ-6 FUSE HOLDER
- GOLD RING TERMINAL RED COLOR
- GOLD RING TERMINAL BLACK COLOR
- GOLD PLATED SPADE TERMINAL RED COLOR
- GOLD PLATED SPADE TERMINAL BLACK COLOR
- 2PCS BUTT SPLICES
- 10 ASSORTED CABLE TIES
- 3 FT. SPLIT LOOM TUBING

**4 Gauge**

**80 AMP AFC FUSE**

**2CH**

**17ft. Power Cable**



**INSTALLATION KITS**



<b>PW-Q CPR-25 BK</b>
• 25FT. 0 GAUGE OXYGEN FREE POWER CABLE
• BLACK COLOR

<b>PW-Q CPR-100 BK</b>
• 100FT. 0 GAUGE OXYGEN FREE POWER CABLE
• BLACK COLOR

<b>PW-4 CPR-100 BK</b>
• 100FT. 0 GAUGE OXYGEN FREE POWER CABLE
• BLACK COLOR

<b>PW-Q CPR-25 RD</b>
• 25FT. 0 GAUGE OXYGEN FREE POWER CABLE
• RED COLOR

<b>PW-Q CPR-100 RD</b>
• 100FT. 0 GAUGE OXYGEN FREE POWER CABLE
• RED COLOR

<b>PW-4 CPR-100 RD</b>
• 100FT. 0 GAUGE OXYGEN FREE POWER CABLE
• RED COLOR



PW-Q CPR-100BK



PW-4 CPR-100FT RD

### SPECIFICATIONS

<b>PK-700SX</b>	<b>700 WATTS</b>
RED POWER CABLE	17' 10 AWG RED
BLACK POWER CABLE	3' 10 AWG BLACK
SPEAKER WIRE	25' 16 AWG
FUSE HOLDER	ATC
FUSE TYPE	30 AMP ATC
LOOM TUBING	3' SPLIT LOOM TUBING
CABLE TIES	10 ASSORTED

### PK-750SX

<b>PK-750SX</b>	<b>750 WATTS</b>
RED POWER CABLE	17' 10 AWG RED
BLACK POWER CABLE	3' 10 AWG SILVER
SPEAKER WIRE	25' 16 AWG
FUSE HOLDER	AGU
FUSE TYPE	40 AMP AGU
LOOM TUBING	3' SPLIT LOOM TUBING
CABLE TIES	10 ASSORTED

### PK-1500SX

<b>PK-1500SX</b>	<b>1500 WATTS</b>
RED POWER CABLE	17' 8GA RED
BLACK POWER CABLE	3' 8GA BLACK
SPEAKER WIRE	25' 16 AWG
FUSE HOLDER	AFC
FUSE TYPE	60 AFC FUSE
LOOM TUBING	3' SPLIT LOOM TUBING
CABLE TIES	10 ASSORTED



**10 Gauge**

**2CH**

**30 AMP**

**17ft.**



**8 Gauge**

**2CH**

**40 AMP**

**17ft.**



## PK-2100PS

PLATINUM SERIES



**INSTALLATION  
KITS**



flexible  
CABLES

**4**  
Gauge

## PK-3000PS

PLATINUM SERIES



**INSTALLATION  
KITS**



flexible  
CABLES

**0**  
Gauge

**SPECIFICATIONS**

	PK-700PS	PK-1500PS	PK-2100PS
Power	700 Watts	1500 Watts	2100 Watts
Primary Wire I	17' 10 AWG Red	17' 8 AWG Red	17' 4 AWG Red
Primary Wire II	3' 10 AWG Silver	3' 8 AWG Silver	3' 4 AWG Silver
Speaker Wire	25' 16 AWG	25' 16 AWG	25' 16 AWG
Fuse Holder	30 AMP ATC	60 AMP AFC	60 AMP AFC
Fuse Type	ATC	AFC	AFC
Loom Tubing	3' Split Loom Tubing	3' Split Loom Tubing	3' Split Loom Tubing
Cable Ties	10 Assorted	10 Assorted	10 Assorted

**INSTALLATION  
KITS**

**8**  
Gauge



PK-1500PS



PK-700PS

**10**  
Gauge



**PK-3000PS**

- 17FT 2RCA to 2RCA Plugs Cable with Signal wire
- 17FT Clear Blue 0 GA Power wire
- 3FT Clear Silver 4 Gauge Power Wire with Terminal
- 1PC Heavy Duty ANL fuse Block Waterproof with 1FT 0 Gauge Blue
- 250A ANL Fuse
- Blue Power Cable and Attached Ring Terminal
- 10 Pcs 18cm Cable Ties
- 10 Pcs Screws
- 1 Pc 0 Gauge to four 4 Gauge power distribution Block

**INSTALLATION  
KITS**

**0**  
Gauge



flexible  
CABLES

## AP-V-20

AP-V SERIES



**HIGH  
CAPACITY**



### AP-V-3

3' 75 OHM RCA VIDEO CABLE

- GOLD PLATED CORROSION RESISTANT CONNECTORS
- FLEXIBLE AND DURABLE PVC OUTER JACKET
- ACTUAL 75 OHM COAXIAL CABLE
- MICRO-LINE STRANDS OF BRAIDED OXYGEN FREE COPPER
- LARGE COLOR-CODED TEXTURED RUBBER GRIP

### AP-V-6

6' 75 OHM RCA VIDEO CABLE

- GOLD PLATED CORROSION RESISTANT CONNECTORS
- FLEXIBLE AND DURABLE PVC OUTER JACKET
- ACTUAL 75 OHM COAXIAL CABLE
- MICRO-LINE STRANDS OF BRAIDED OXYGEN FREE COPPER
- LARGE COLOR-CODED TEXTURED RUBBER GRIP

### AP-V-12

12' 75 OHM RCA VIDEO CABLE

- GOLD PLATED CORROSION RESISTANT CONNECTORS
- FLEXIBLE AND DURABLE PVC OUTER JACKET
- ACTUAL 75 OHM COAXIAL CABLE
- MICRO-LINE STRANDS OF BRAIDED OXYGEN FREE COPPER
- LARGE COLOR-CODED TEXTURED RUBBER GRIP

### AP-V-15

15' 75 OHM RCA VIDEO CABLE

- GOLD PLATED CORROSION RESISTANT CONNECTORS
- FLEXIBLE AND DURABLE PVC OUTER JACKET
- ACTUAL 75 OHM COAXIAL CABLE
- MICRO-LINE STRANDS OF BRAIDED OXYGEN FREE COPPER
- LARGE COLOR-CODED TEXTURED RUBBER GRIP

### AP-V-20

20' 75 OHM RCA VIDEO CABLE

- GOLD PLATED CORROSION RESISTANT CONNECTORS
- FLEXIBLE AND DURABLE PVC OUTER JACKET
- ACTUAL 75 OHM COAXIAL CABLE
- MICRO-LINE STRANDS OF BRAIDED OXYGEN FREE COPPER
- LARGE COLOR-CODED TEXTURED RUBBER GRIP



OEM INTERFACING

## APNR-2002



HI/LOW IMPEDANCE ADAPTOR

- FULL DC ISOLATION
- CONVERTS FROM 1.5-35 WATTS PER CHANNEL PRE-AMP OUTPUT
- ADJUSTABLE LINE OUTPUT CONVERTER
- ADJUSTABLE FROM 0 TO 1,000 MV



### APNR-3002

HI/LOW IMPEDANCE ADAPTOR

- FULL DC ISOLATION
- CONVERTS FROM 25-55 WATTS PER CHANNEL PRE-AMP OUTPUT
- ADJUSTABLE LINE OUTPUT CONVERTER
- ADJUSTABLE FROM 0 TO 1,000 MV



# ACCESSORIES

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## APNR-MLRN

APNR SERIES

- REMOTE EXPANDER
- MAX OUTPUT CURRENT: 30A
- CONTROL THE 12V OUTPUT OF REMOTE
- FULL DC ISOLATION
- ADJUSTABLE LINE OUTPUT CONVERTER
- ADJUSTABLE FROM 0 TO 1,000 MILLIVOLTS
- CONVERTS FROM 45-65 WATTS PER CHANNEL PRE-AMP OUTPUT



# ACCESSORIES

OEM INTERFACING


## APNR-RM4

- HI/LOW IMPEDANCE ADAPTOR
- FULL DC ISOLATION
- CONVERTS FROM 45-65 WATTS PER CHANNEL
- PRE-AMP OUTPUT
- ADJUSTABLE LINE OUTPUT CONVERTER
- ADJUSTABLE FROM 0 TO 1,000 MV



## APNR-RM

- LINE OUTPUT CONVERTER WITH REMOTE TURN ON
- GOLD FEMALE RCA OUTPUT
- ADJUSTABLE LINE OUTPUT CONVERTER
- CONVERTS FROM 10 TO 25 WATTS PER CHANNEL TO PRE-AMP OUTPUT
- REMOTE TURN ON CIRCUIT

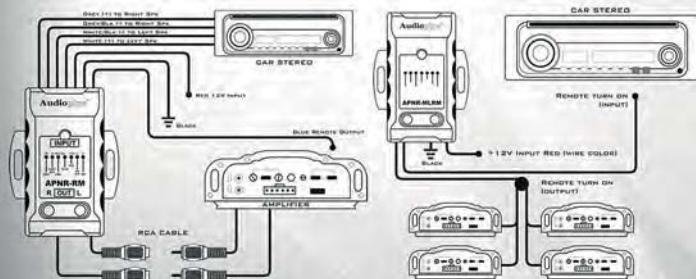

# ACCESSORIES

HIGH PERFORMANCE CAR AUDIO PRODUCTS

## ATVP-3553BT

ATV OFF ROAD SOUND SYSTEM



3.5MM INPUT



QUICK DISCONNECT


- 400 WATTS POWER (P.M.P.O.)
- 200 WATTS POWER (R.M.S.)
- FREQUENCY RESPONSE: 45-25 KHZ
- SENSITIVITY: 90 DB
- 1.5" 2-LAYER VOICE COIL KAPTON
- RUBBER SURROUND PIANO BLACK IMPP CONE
- SILK DOME DIAPHRAGM HIGH PERFORMANCE TWEETER
- 24 OZ MAGNET
- CONTAINS TRANSMITTER MODULE

## ATVP-1500BT

ATV OFF ROAD SOUND SYSTEM



- 200 WATTS POWER (P.M.P.O.)
- 100 WATTS POWER (R.M.S.)
- FREQUENCY RESPONSE: 45-20 KHZ
- SENSITIVITY: 90 DB
- CONTAINS TRANSMITTER MODULE
- 1.2" 2-LAYER VOICE COIL KAPTON
- RUBBER SURROUND PIANO BLACK IMPP CONE
- SILK DOME DIAPHRAGM HIGH PERFORMANCE TWEETER
- 15 OZ MAGNET



3.5MM INPUT



QUICK DISCONNECT



# ACCESSORIES

## ATVP-3500BT

ATVP SERIES



## 2016 ATVP ATV Off Road Sound System

- 350 WATTS POWER (P.M.P.O.)
- 175 WATTS POWER (R.M.S.)
- FREQUENCY RESPONSE: 45-25 KHZ
- SENSITIVITY: 90 DB
- 1.5" 2-LAYER VOICE COIL KAPTON
- RUBBER SURROUND PIANO BLACK IMPP CONE
- SILK DOME DIAPHRAGM HIGH PERFORMANCE TWEETER
- 24 OZ MAGNET
- CONTAINS TRANSMITTER MODULE

